


Performance Range

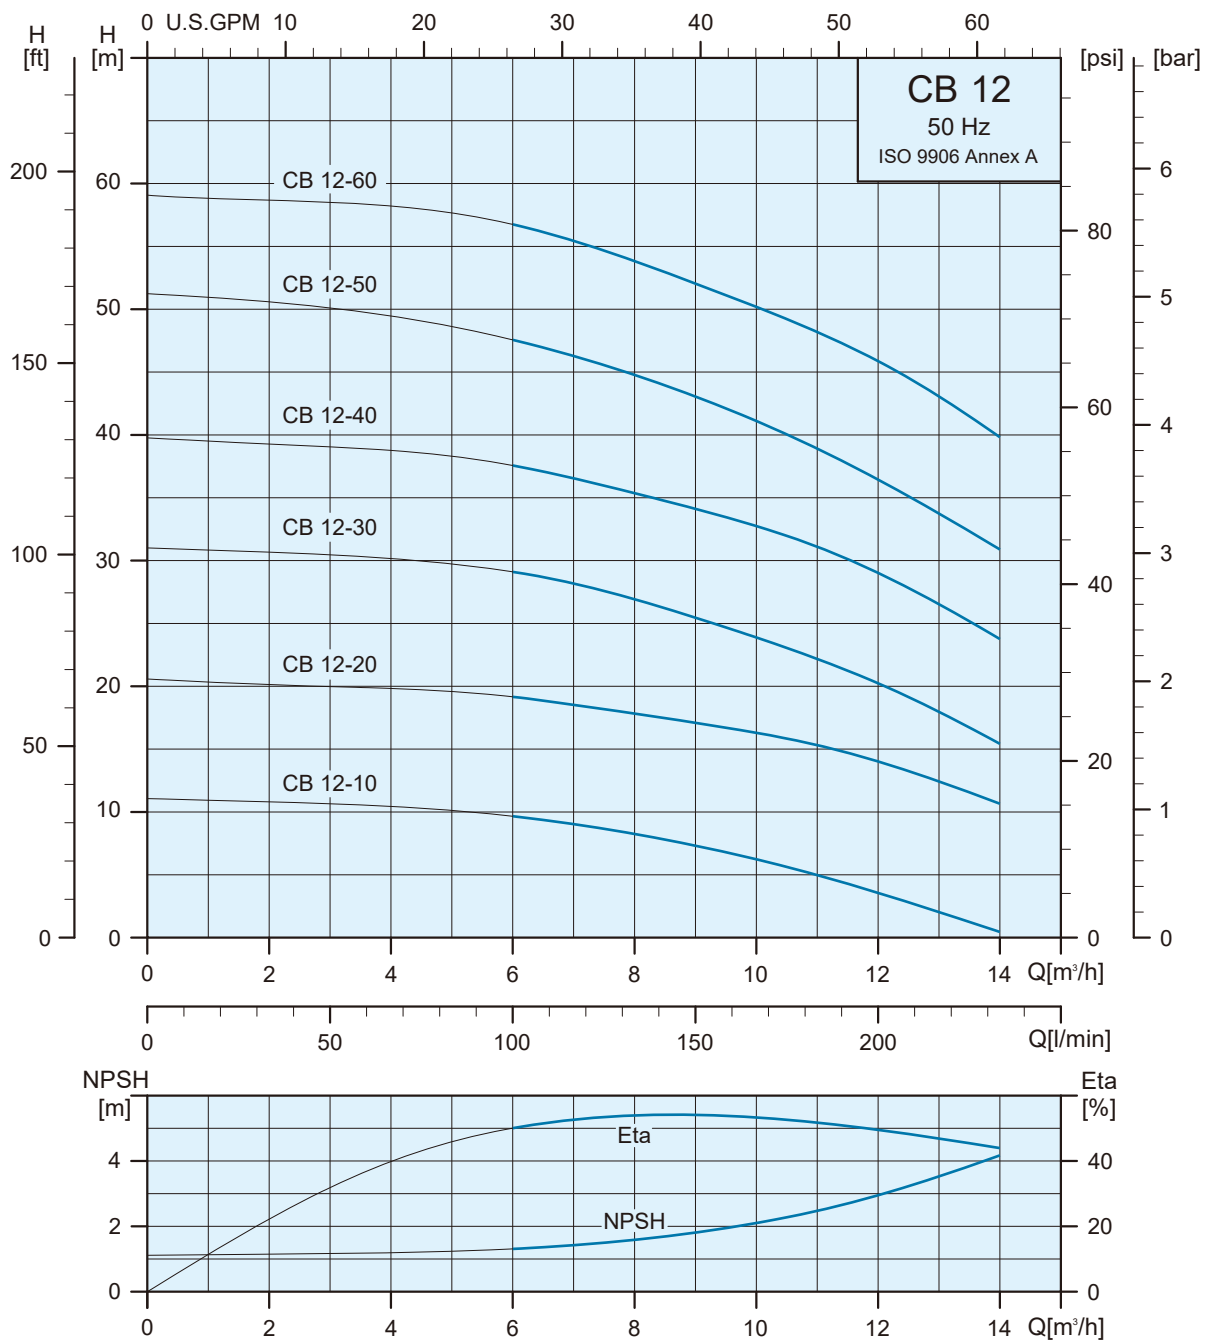

Specifications(2850rpm)

Pump Type	220-240V			Δ 220-240 / Y 380-415V		
	1Ø			3Ø		
	Max.Amp	P1[W]	P2[W]	Max.Amp	P1[W]	P2[W]
CB 12-10	Not available	Not available	Not available	2.8 - 3.1 / 1.6 - 1.8	590	455
CB 12-20	5.3 - 5.1	1160	935	3.8 - 4.0 / 2.2 - 2.3	1170	950
CB 12-30	7.8 - 7.4	1680	1330	5.7 - 6.5 / 3.3 - 3.8	1690	1365
CB 12-40	11.0 - 10.6	2400	1995	7.3 - 7.6 / 4.2 - 4.4	2350	1960
CB 12-50	12.7 - 12.2	2910	2440	8.8 - 9.0 / 5.1 - 5.2	2820	2375
CB 12-60	Not available	Not available	Not available	10.6 - 11.4 / 6.1 - 6.6	3320	2860

Dimensions and Weights

CB 12

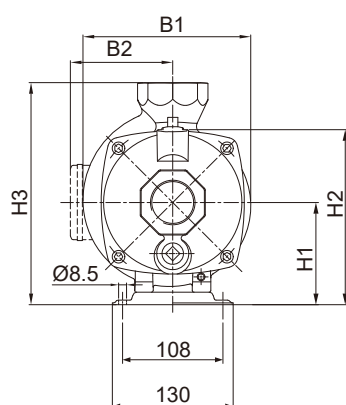


Fig. 1



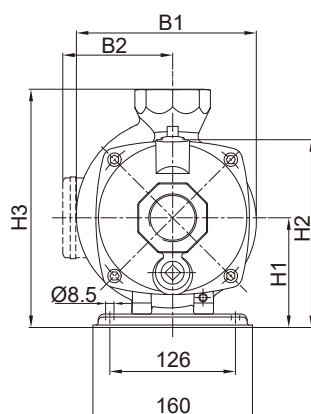


Fig. 2

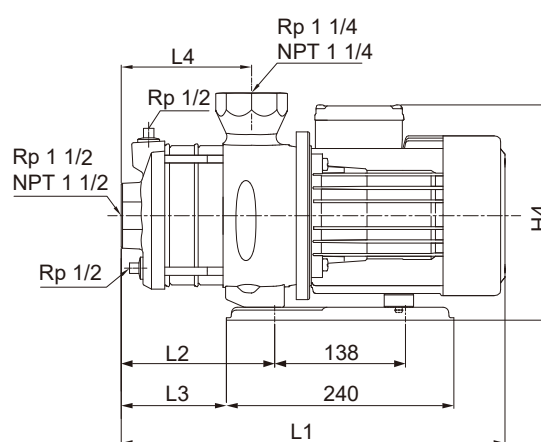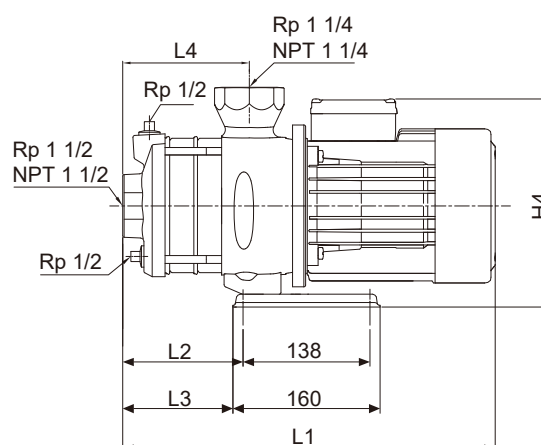

Pump Type	Phase	Dimensions (mm)										Fig.	Net Weight (kg)
		L1	L2	L3	L4	B1	B2	H1	H2	H3	H4		
CB 12-10	1Ø	Not available	Not available	Not available	77	Not available	Not available	110	187	239	Not available	Not available	Not available
	3Ø	320	54	41	77	181	114	110	187	239	224	1	17.9
CB 12-20	1Ø	360	54	41	77	181	135	110	187	239	245	1	18.4
	3Ø	360	54	41	77	181	114	110	187	239	224	1	18.2
CB 12-30	1Ø	390	84	71	107	181	135	110	187	239	245	1	20.6
	3Ø	390	84	71	107	181	114	110	187	239	224	1	20.4
CB 12-40	1Ø	450	132	81	107	185	152	110	187	239	262	2	27.7
	3Ø	450	132	81	107	185	139	110	187	239	249	2	26.7
CB 12-50	1Ø	480	162	111	137	185	152	110	187	239	262	2	29.8
	3Ø	480	162	111	137	185	139	110	187	239	249	2	29.9
CB 12-60	1Ø	Not available	Not available	Not available	137	Not available	Not available	122	199	251	Not available	Not available	Not available
	3Ø	501	162	111	137	196	150	122	199	251	272	2	35.2