


Performance Range


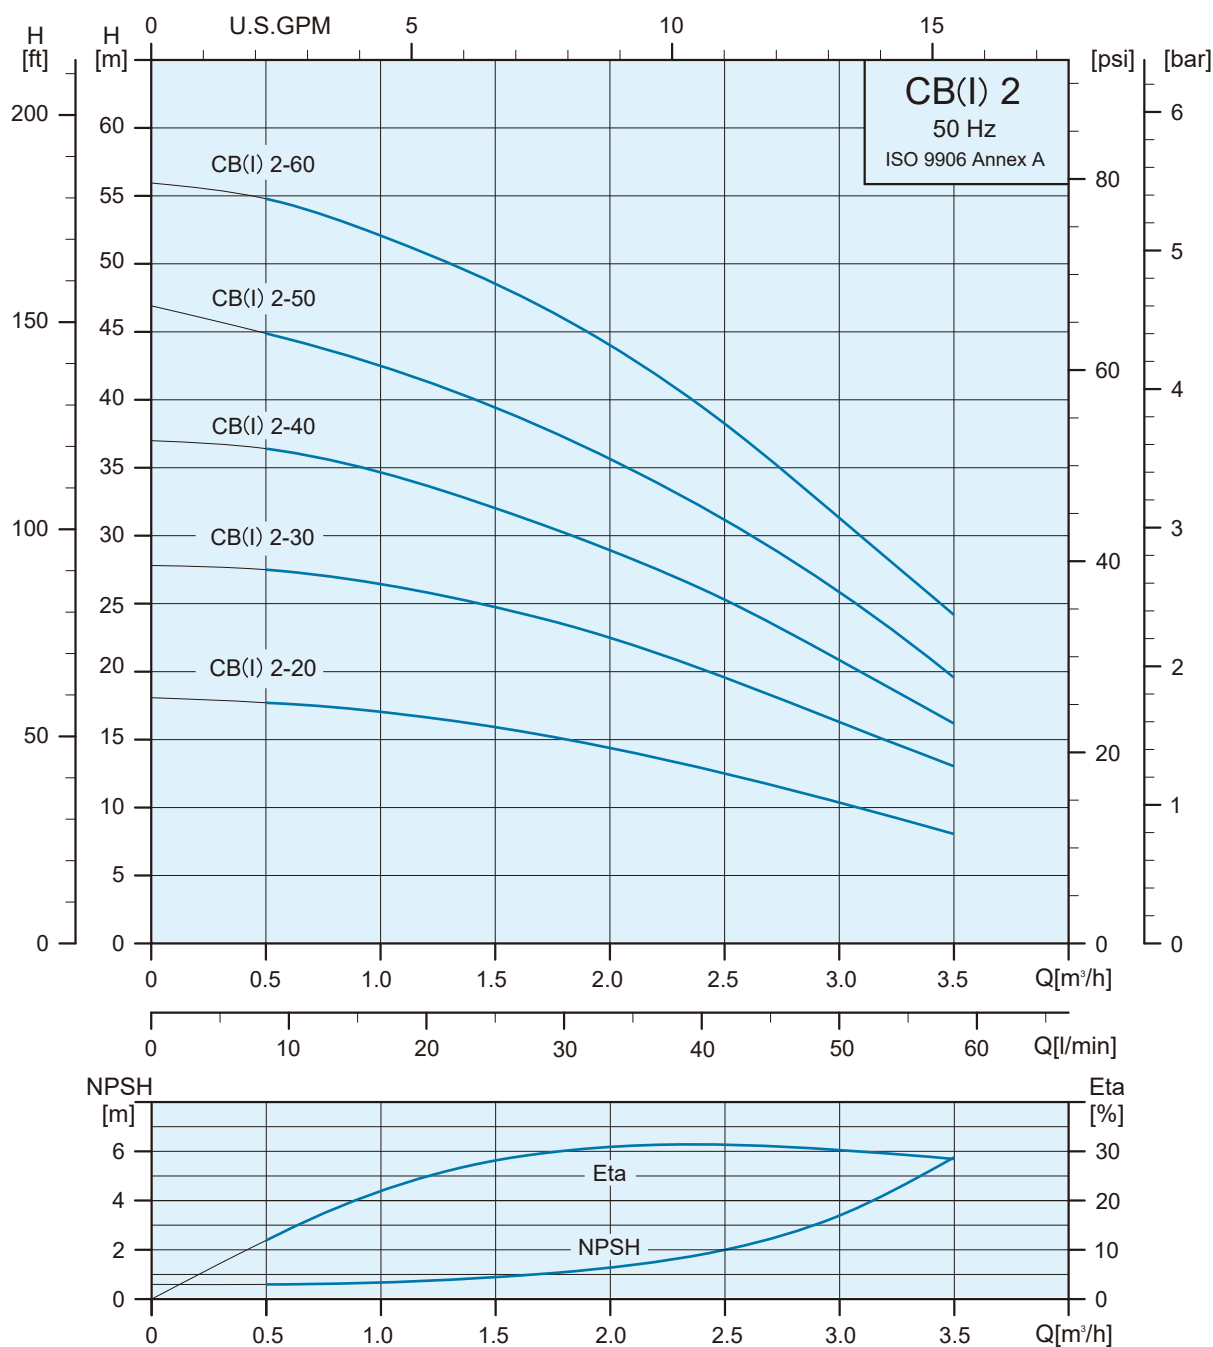


Specifications(2850rpm)



Pump Type	220-240V			Δ 220-240 / Y 380-415V		
	1Ø			3Ø		
	Max.Amp	P1[W]	P2[W]	Max.Amp	P1[W]	P2[W]
CB/CBI 2-20	1.7 - 2.0	380	295	2.2 - 2.6 / 1.3 - 1.5	430	330
CB/CBI 2-30	2.1 - 2.2	470	360	2.2 - 2.5 / 1.3 - 1.45	530	410
CB/CBI 2-40	2.7 - 2.8	620	480	2.4 - 2.8 / 1.4 - 1.6	660	510
CB/CBI 2-50	3.2 - 3.1	720	550	2.5 - 2.9 / 1.45 - 1.7	770	585
CB/CBI 2-60	3.7 - 3.6	830	630	2.9 - 3.3 / 1.7 - 1.9	860	655

Dimensions and Weights

CB 2

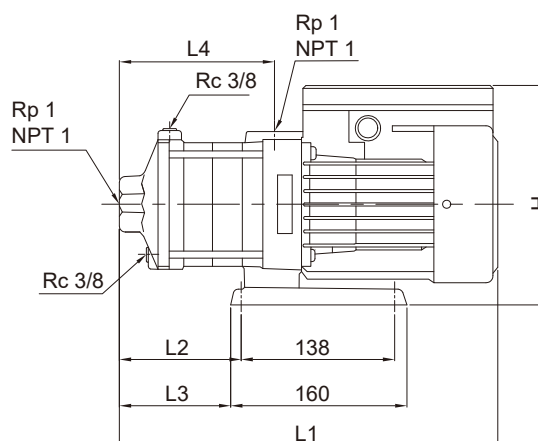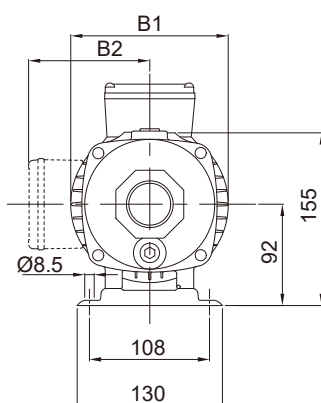

CBI 2

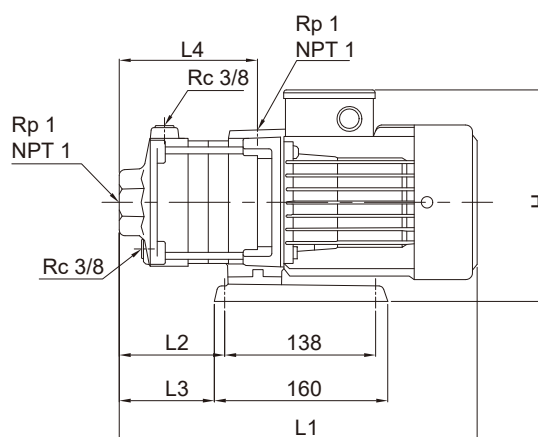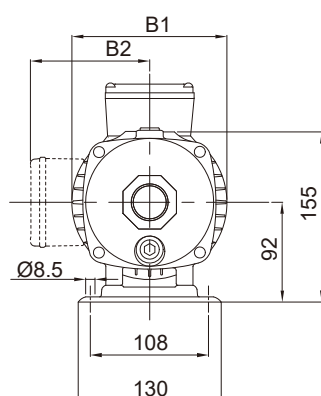

Pump Type	Phase	Dimensions (mm)							Net Weight (kg)
		L1	L2	L3	L4	B1	B2	H	
CB 2-20	1Ø	309	75	63	101	141	136	228	10.3
	3Ø	309	75	63	101	141	115	207	10.0
CB 2-30	1Ø	327	93	81	119	141	136	228	10.5
	3Ø	327	93	81	119	141	115	207	10.3
CB 2-40	1Ø	345	111	99	137	141	136	228	10.8
	3Ø	345	111	99	137	141	115	207	10.5
CB 2-50	1Ø	363	129	117	155	141	136	228	11.6
	3Ø	363	129	117	155	141	115	207	11.2
CB 2-60	1Ø	381	147	135	173	141	136	228	11.8
	3Ø	381	147	135	173	141	115	207	11.5
CBI 2-20	1Ø	309	75	63	101	141	136	228	9.1
	3Ø	309	75	63	101	141	115	207	8.8
CBI 2-30	1Ø	327	93	81	119	141	136	228	9.4
	3Ø	327	93	81	119	141	115	207	9.1
CBI 2-40	1Ø	345	111	99	137	141	136	228	9.6
	3Ø	345	111	99	137	141	115	207	9.4
CBI 2-50	1Ø	363	129	117	155	141	136	228	10.4
	3Ø	363	129	117	155	141	115	207	10.1
CBI 2-60	1Ø	381	147	135	173	141	136	228	10.7
	3Ø	381	147	135	173	141	115	207	10.3