


Performance Range


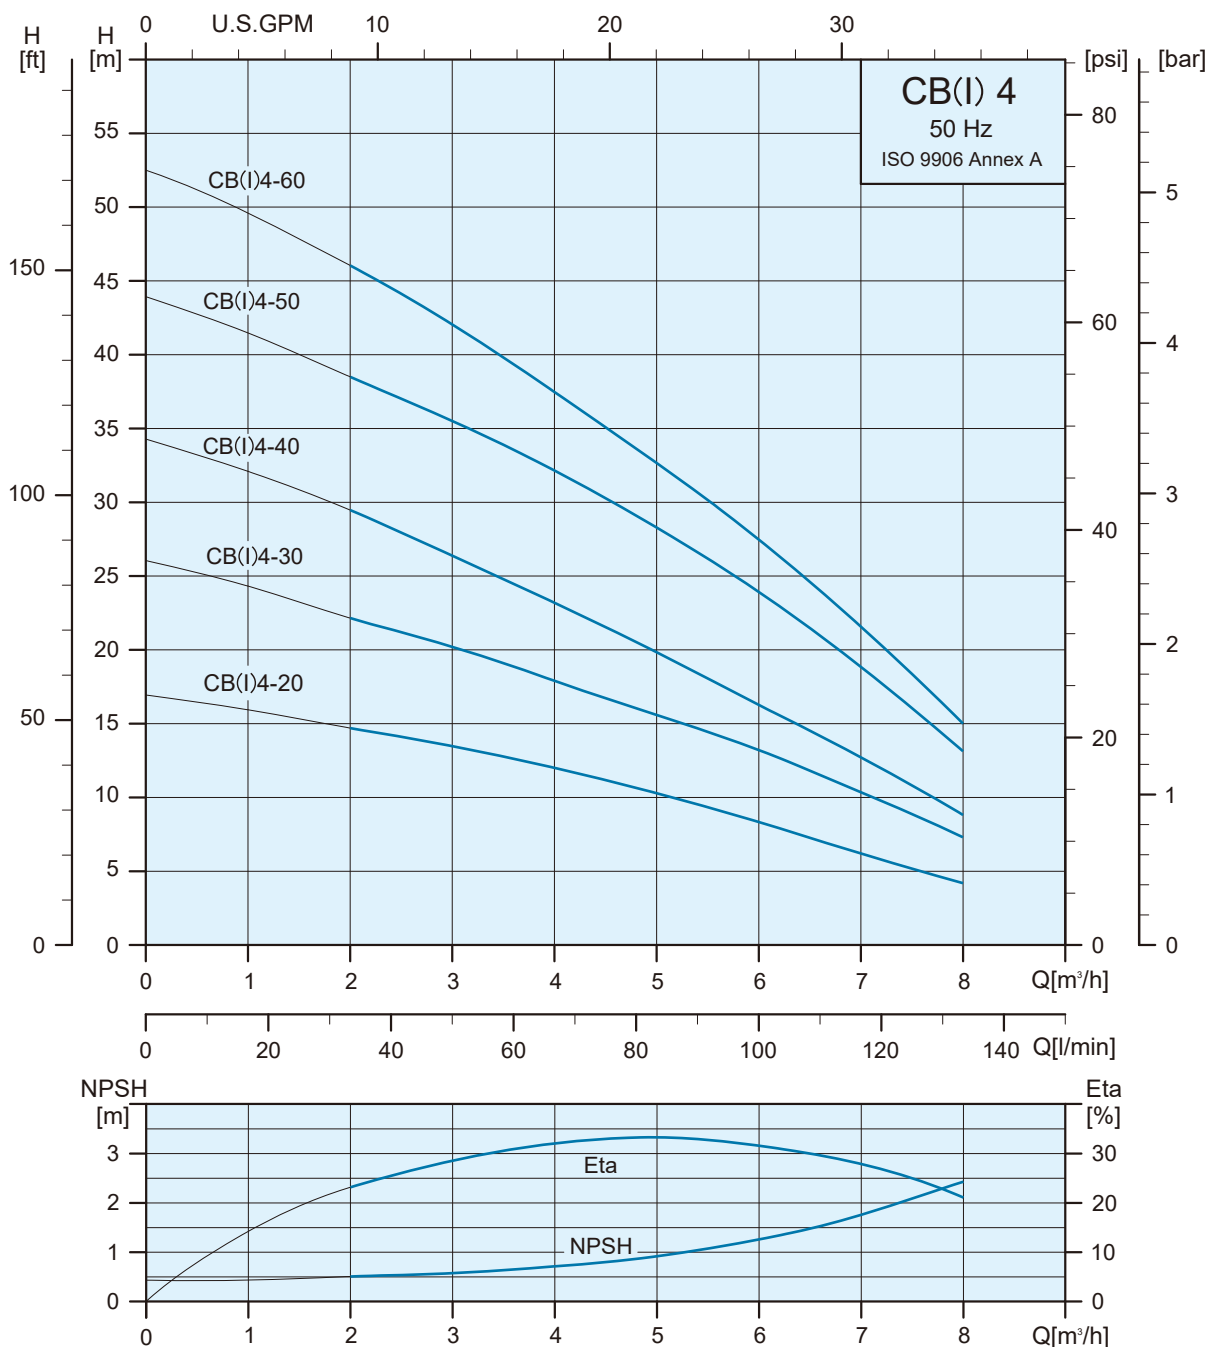


Specifications(2850rpm)



Pump Type	220-240V			Δ 220-240 / Y 380-415V		
	1Ø			3Ø		
	Max.Amp	P1[W]	P2[W]	Max.Amp	P1[W]	P2[W]
CB/CBI 4-20	2.6 - 2.5	560	430	2.4 - 2.9 / 1.4 - 1.7	610	465
CB/CBI 4-30	3.6 - 3.5	770	595	2.5 - 2.9 / 1.5 - 1.7	790	604
CB/CBI 4-40	4.4 - 4.1	960	735	3.1 - 3.3 / 1.8 - 1.9	1010	770
CB/CBI 4-50	5.3 - 5.0	1160	940	4.2 - 4.5 / 2.4 - 2.6	1240	990
CB/CBI 4-60	6.7 - 6.4	1430	1135	5.1 - 5.5 / 2.9 - 3.2	1460	1180

Dimensions and Weights

CB 4

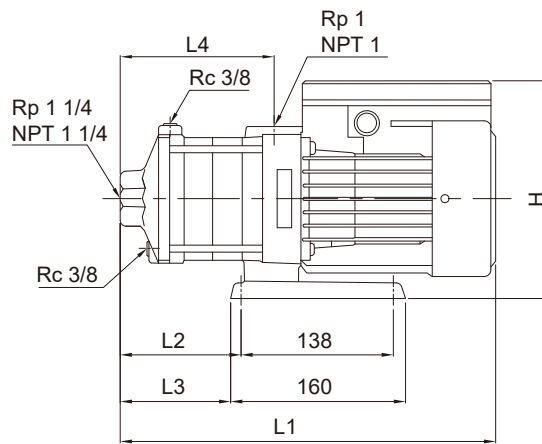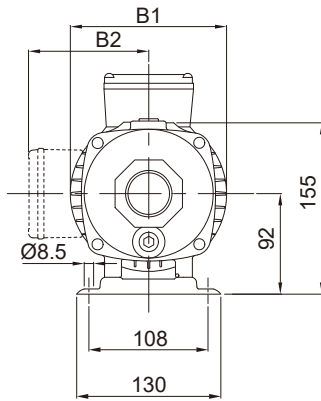

CBI 4

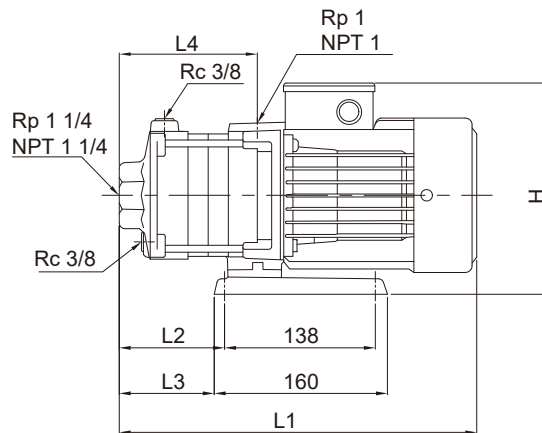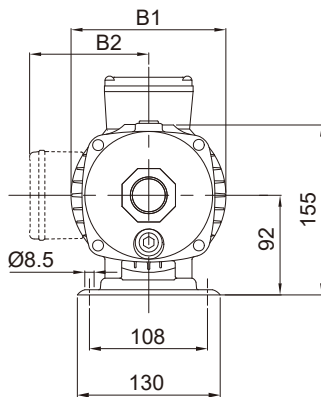

Pump Type	Phase	Dimensions (mm)							Net Weight (kg)
		L1	L2	L3	L4	B1	B2	H	
CB 4-20	1Ø	318	84	72	110	141	136	228	10.4
	3Ø	318	84	72	110	141	115	207	10.1
CB 4-30	1Ø	344	111	99	137	141	136	228	10.8
	3Ø	344	111	99	137	141	115	207	10.5
CB 4-40	1Ø	372	138	126	164	141	136	228	11.6
	3Ø	372	138	126	164	141	115	207	11.2
CB 4-50	1Ø	438	165	153	191	141	136	228	13.4
	3Ø	438	165	153	191	141	115	207	13.1
CB 4-60	1Ø	465	192	180	218	141	136	228	14.8
	3Ø	465	192	180	218	141	115	207	14.5
CBI 4-20	1Ø	318	84	72	110	141	136	228	9.2
	3Ø	318	84	72	110	141	115	207	9.0
CBI 4-30	1Ø	344	111	99	137	141	136	228	9.6
	3Ø	344	111	99	137	141	115	207	9.3
CBI 4-40	1Ø	372	138	126	164	141	136	228	10.4
	3Ø	372	138	126	164	141	115	207	10.1
CBI 4-50	1Ø	438	165	153	191	141	136	228	11.3
	3Ø	438	165	153	191	141	115	207	12.0
CBI 4-60	1Ø	465	192	180	218	141	136	228	13.6
	3Ø	465	192	180	218	141	115	207	13.4