


Performance Range

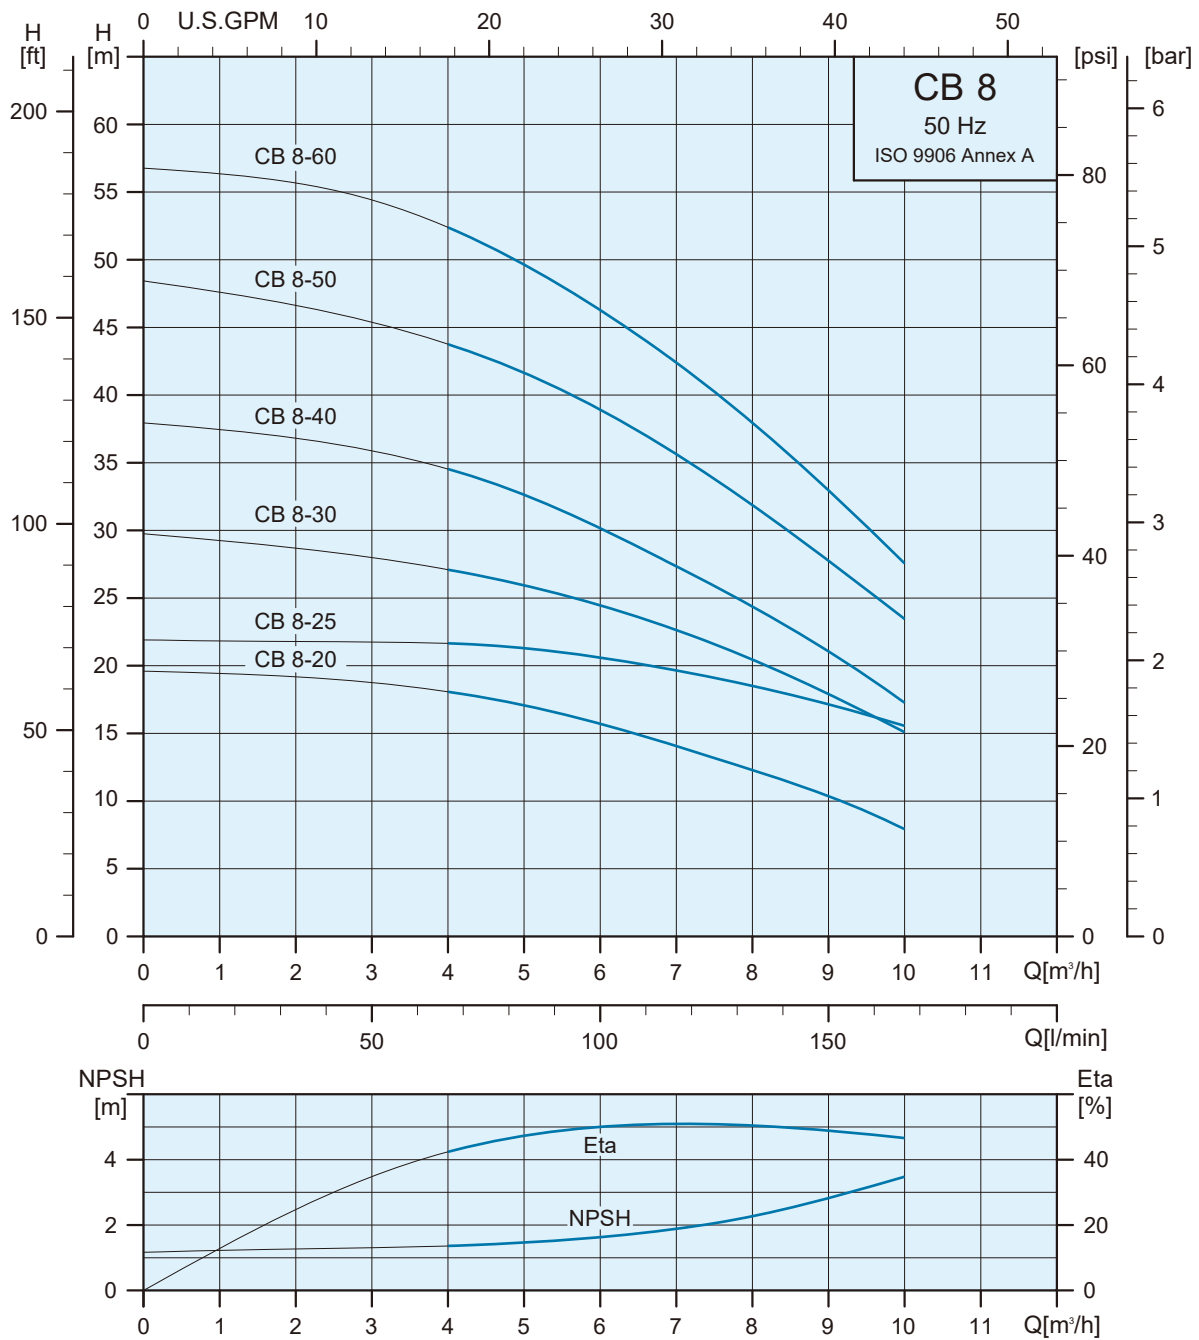

Specifications(2850rpm)

Pump Type	220-240V			Δ 220-240 / Y 380-415V		
	1Ø			3Ø		
	Max.Amp	P1[W]	P2[W]	Max.Amp	P1[W]	P2[W]
CB 8-20	3.3 - 3.2	760	595	2.9 - 3.3 / 1.7 - 1.9	810	620
CB 8-25	Not available	Not available	Not available	3.5 - 3.8 / 2.0 - 2.2	1060	860
CB 8-30	5.2 - 5.0	1130	910	4.3 - 4.8 / 2.5 - 2.8	1260	1020
CB 8-40	6.3 - 6.1	1390	1105	5.7 - 6.3 / 3.3 - 3.7	1520	1205
CB 8-50	8.2 - 8.1	1940	1610	5.7 - 6.3 / 3.4 - 3.7	1860	1475
CB 8-60	9.0 - 8.8	2090	1740	6.5 - 7.0 / 3.8 - 4.1	2110	1755

Dimensions and Weights

CB 8

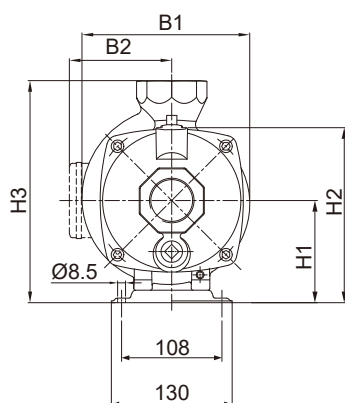


Fig. 1



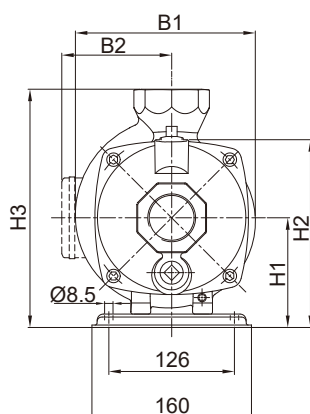


Fig. 2

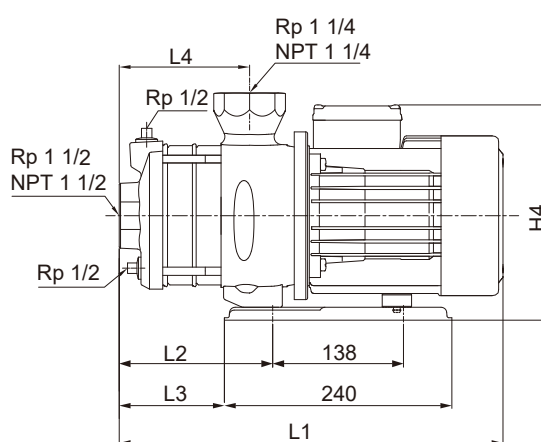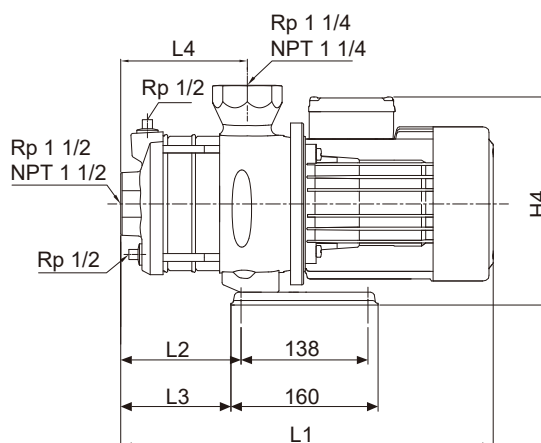

Pump Type	Phase	Dimensions (mm)										Fig.	Net Weight (kg)
		L1	L2	L3	L4	B1	B2	H1	H2	H3	H4		
CB 8-20	1Ø	320	54	41	77	181	135	110	187	239	245	1	17.2
	3Ø	320	54	41	77	181	114	110	187	239	224	1	17.0
CB 8-25	1Ø	Not available	Not available	Not available	107	Not available	Not available	110	187	239	Not available	Not available	Not available
	3Ø	390	84	71	107	181	114	110	187	239	224	1	19.1
CB 8-30	1Ø	390	84	71	107	181	135	110	187	239	245	1	19.5
	3Ø	390	84	71	107	181	114	110	187	239	224	1	19.2
CB 8-40	1Ø	390	84	71	107	181	135	110	187	239	245	1	20.7
	3Ø	390	84	71	107	181	114	110	187	239	224	1	20.5
CB 8-50	1Ø	480	162	111	137	185	152	110	187	239	262	2	28.5
	3Ø	420	114	101	137	181	114	110	187	239	224	1	21.4
CB 8-60	1Ø	480	162	111	137	185	152	110	187	239	262	2	28.7
	3Ø	480	162	111	137	185	139	110	187	239	249	2	27.6