



Performance Range

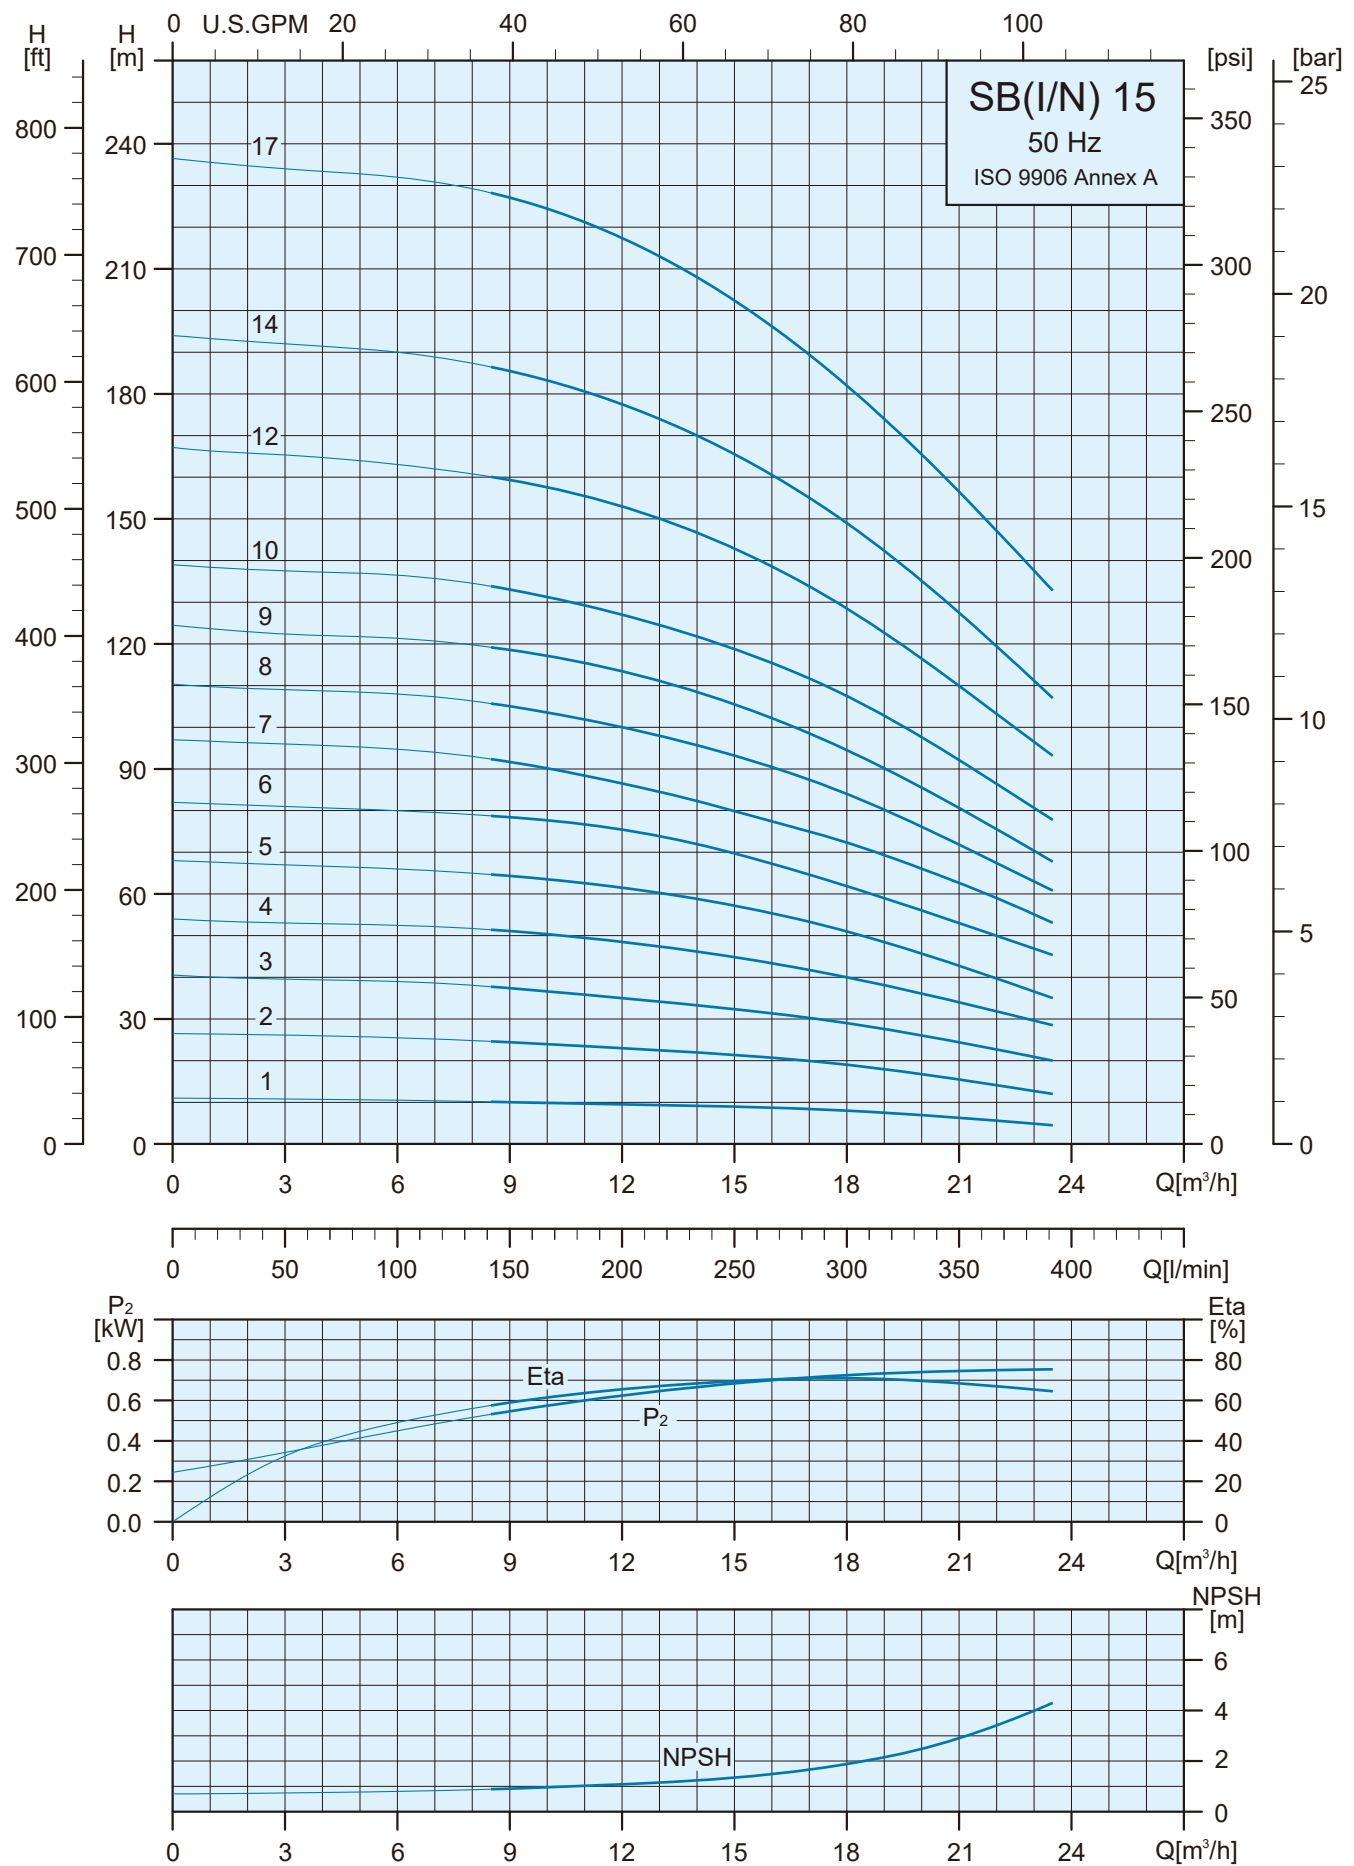

Specifications

Pump Type	Motor		Nominal Current [A]				
	P ₂		1ø	3ø		3ø	
	kW	HP	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V
SB 15-1	1.1	1.5	8.0 - 6.9	4.0 - 3.8	2.3 - 2.2	—	—
SB 15-2	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SB 15-3	3.0	4.0	—	11.4 - 11.2	6.6 - 6.5	6.4 - 6.0	3.7 - 3.5
SB 15-4	4.0	5.5	—	14.9 - 15.1	8.6 - 8.7	8.5 - 8.2	4.9 - 4.7
SB 15-5	4.0	5.5	—	14.9 - 15.1	8.6 - 8.7	8.5 - 8.2	4.9 - 4.7
SB 15-6	5.5	7.5	—	19.7 - 19.4	11.4 - 11.2	11.3 - 10.9	6.5 - 6.3
SB 15-7	5.5	7.5	—	19.7 - 19.4	11.4 - 11.2	11.3 - 10.9	6.5 - 6.3
SB 15-8	7.5	10.0	—	26.3 - 25.4	15.2 - 14.7	15.3 - 15.2	8.8 - 8.7
SB 15-9	7.5	10.0	—	26.3 - 25.4	15.2 - 14.7	15.3 - 15.2	8.8 - 8.7
SB 15-10	11.0	15.0	—	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7
SB 15-12	11.0	15.0	—	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7
SB 15-14	11.0	15.0	—	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7
SB 15-17	15.0	20.0	—	49.3 - 46.5	28.5 - 26.9	29.4 - 29.0	16.9 - 16.7

Dimensions and Weights

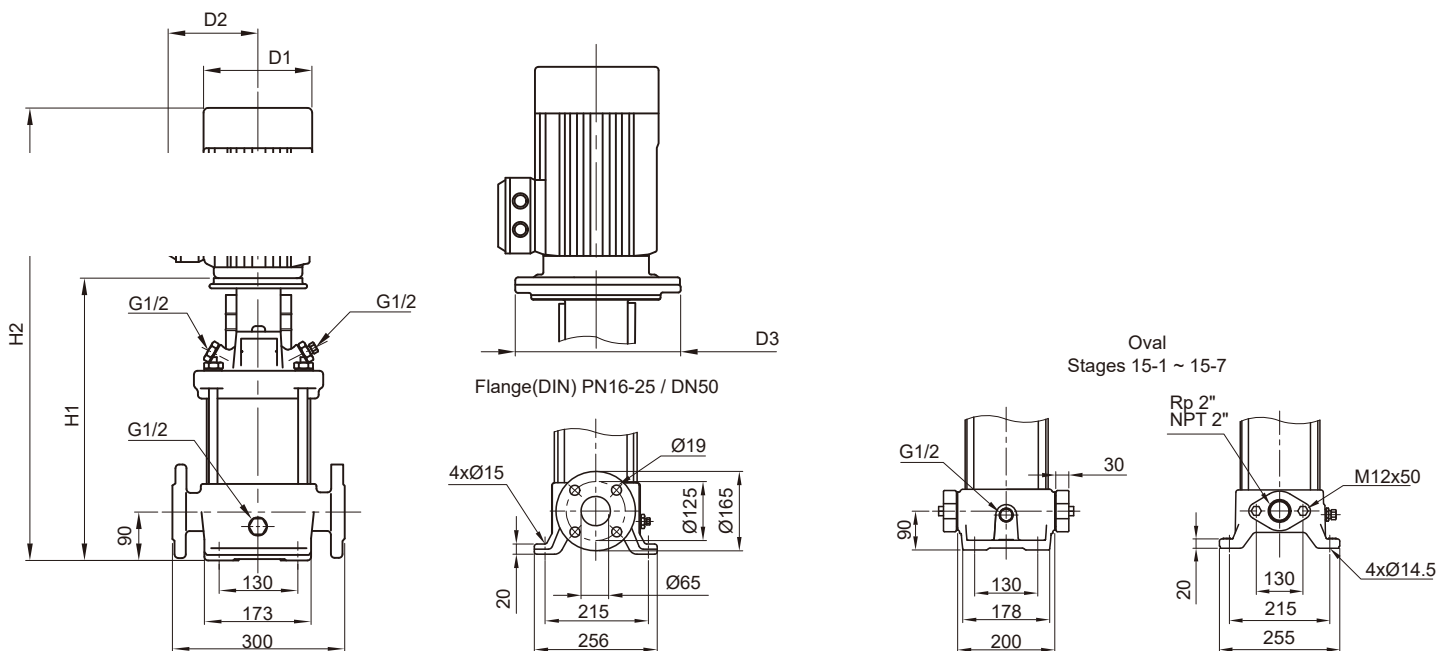

Pump Type	Dimensions (mm)							Net Weight (kg)	
	DIN flange		OVAL		D1	D2	D3	DIN flange	OVAL
	H1	H2	H1	H2					
SB 15-1	400	689	400	689	177	141	—	49.4	47.8
SB 15-2	415	710	415	710	177	141	—	55.7	54.0
SB 15-3	465	781	465	781	197	147	—	66.3	64.7
SB 15-4	510	836	510	836	220	161	—	71.7	70.1
SB 15-5	555	881	555	881	220	161	—	73.2	71.6
SB 15-6	632	994	632	994	235	197	300	101.6	100.0
SB 15-7	677	1039	677	1039	235	197	300	103.1	101.5
SB 15-8	722	1127	—	—	235	197	300	110.7	—
SB 15-9	767	1172	—	—	235	197	300	112.2	—
SB 15-10	889	1334	—	—	269	215	350	145.5	—
SB 15-12	979	1424	—	—	269	215	350	148.5	—
SB 15-14	1069	1514	—	—	269	215	350	151.8	—
SB 15-17	1204	1694	—	—	269	215	350	167.5	—