



Performance Range

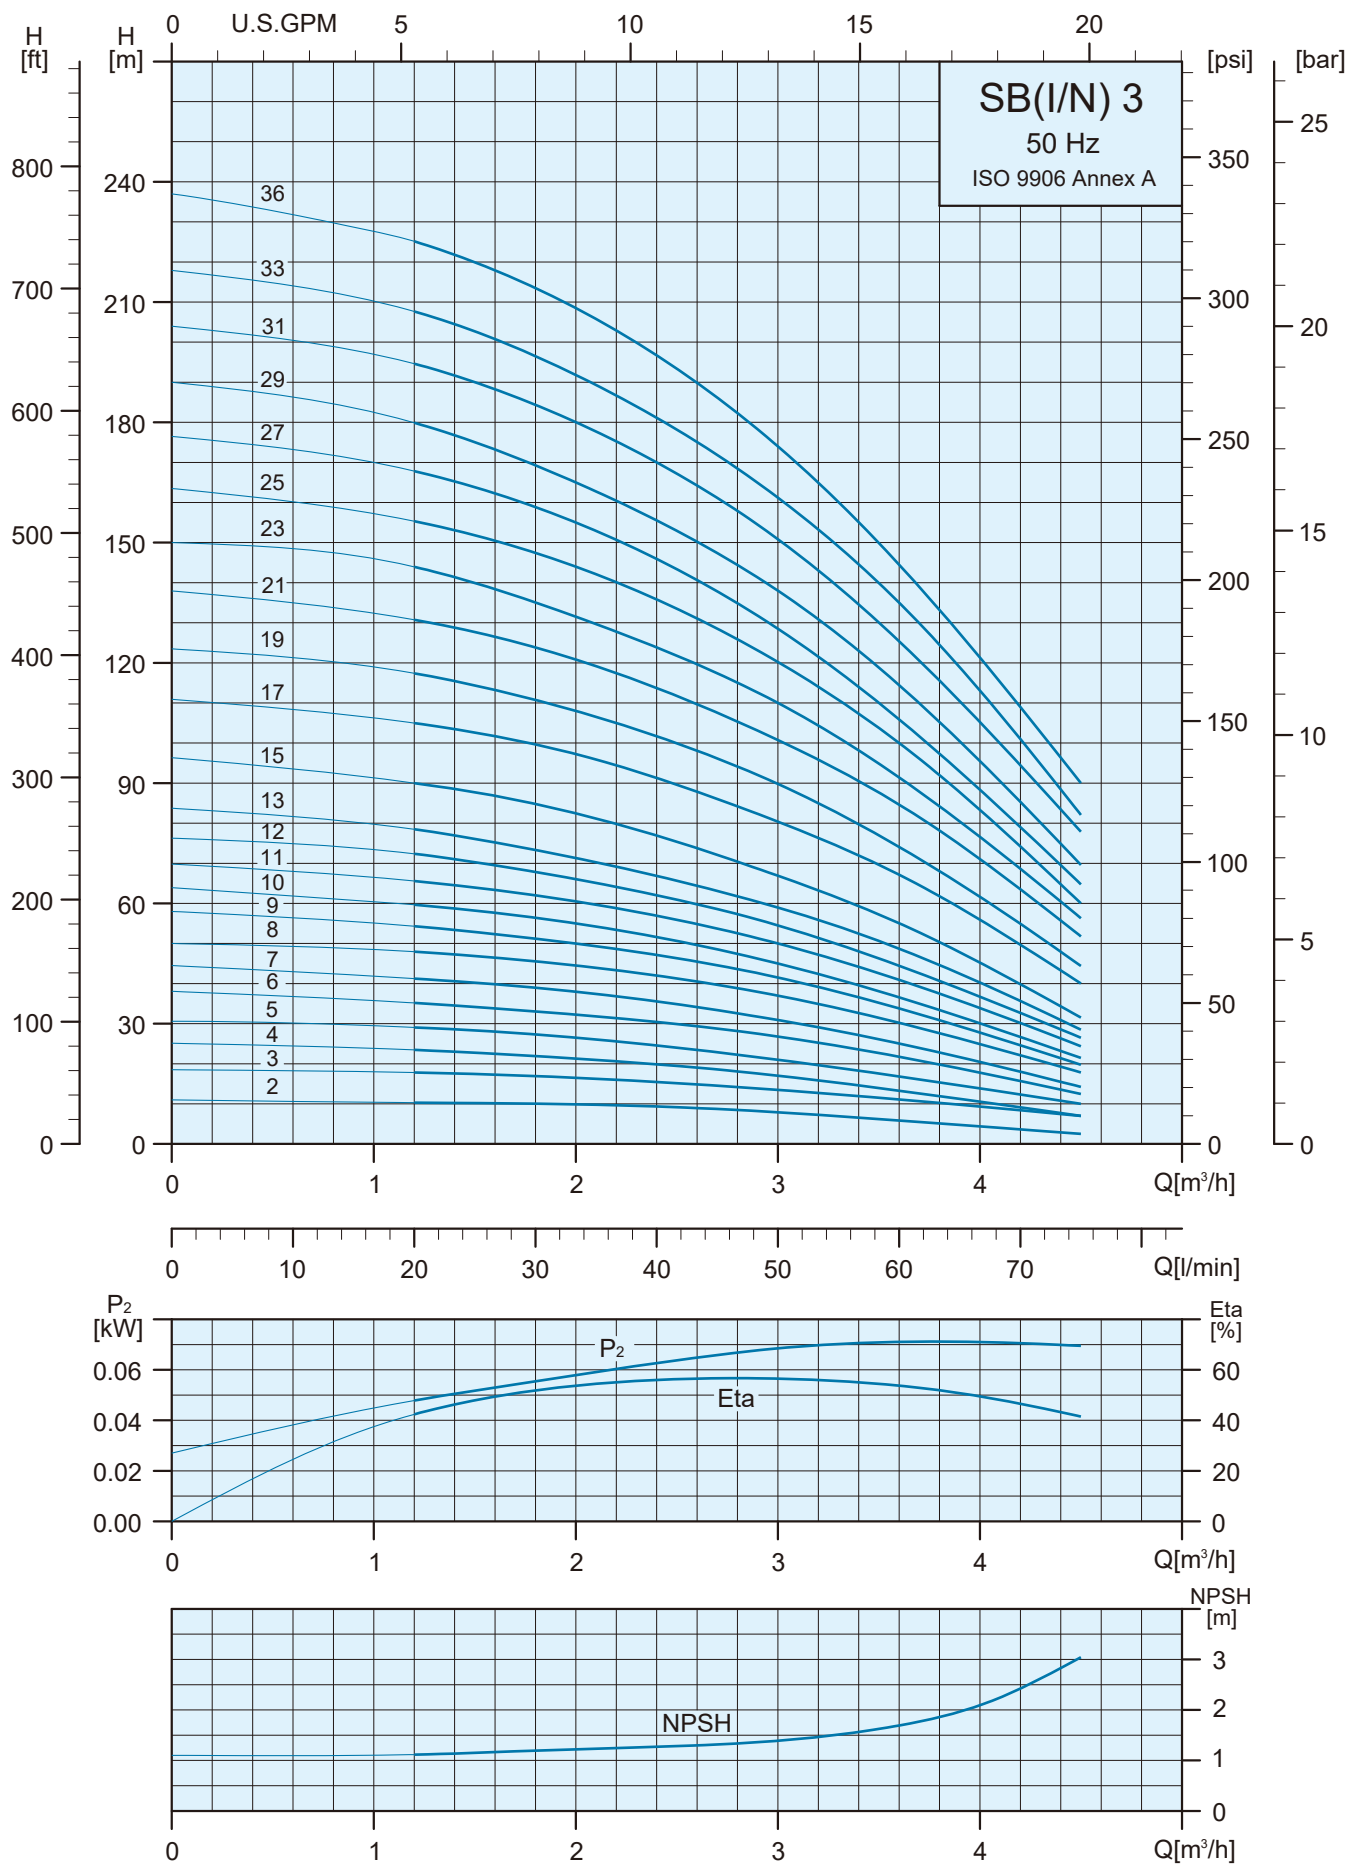


Pump Type	Motor		Nominal Current [A]				
	P ₂		1Ø	3Ø		3Ø	
	kW	HP	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V
SB 3-2	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	—	—
SB 3-3	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	—	—
SB 3-4	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	—	—
SB 3-5	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	—	—
SB 3-6	0.55	0.75	4.0 - 3.5	2.6 - 2.9	1.5 - 1.7	—	—
SB 3-7	0.55	0.75	4.0 - 3.5	2.6 - 2.9	1.5 - 1.7	—	—
SB 3-8	0.75	1.0	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	—	—
SB 3-9	0.75	1.0	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	—	—
SB 3-10	0.75	1.0	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	—	—
SB 3-11	1.1	1.5	8.0 - 6.9	4.0 - 3.8	2.3 - 2.2	—	—
SB 3-12	1.1	1.5	8.0 - 6.9	4.0 - 3.8	2.3 - 2.2	—	—
SB 3-13	1.1	1.5	8.0 - 6.9	4.0 - 3.8	2.3 - 2.2	—	—

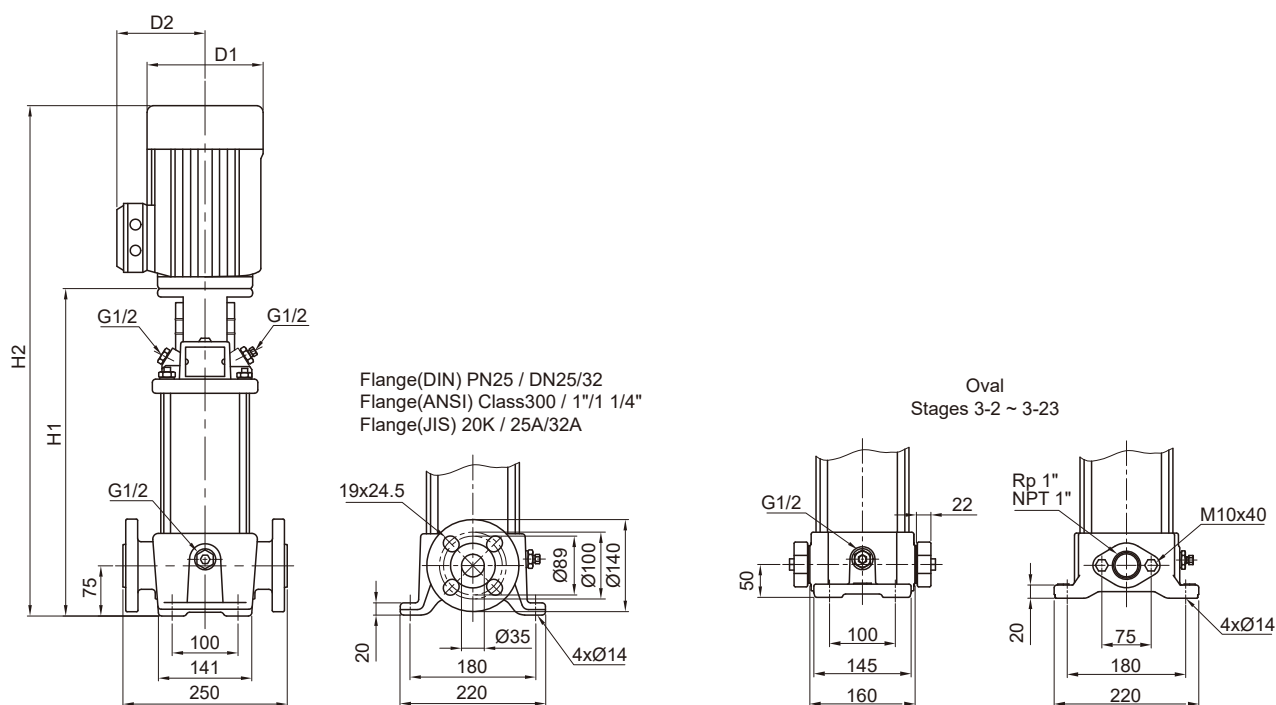

Pump Type	Dimensions (mm)						Net Weight (kg)	
	DIN flange		OVAL		D1	D2	DIN flange	OVAL
	H1	H2	H1	H2				
SB 3-2	279	474	254	449	141	115	23.4	19.3
SB 3-3	279	474	254	449	141	115	23.4	19.3
SB 3-4	297	492	272	467	141	115	23.8	19.7
SB 3-5	315	510	290	485	141	115	24.2	20.1
SB 3-6	333	528	308	503	141	115	25.0	20.9
SB 3-7	351	546	326	521	141	115	25.4	21.3
SB 3-8	375	610	350	585	141	115	27.9	23.8
SB 3-9	393	628	368	603	141	115	28.3	24.2
SB 3-10	411	646	386	621	141	115	28.7	24.6
SB 3-11	429	718	404	693	177	141	35.8	31.7
SB 3-12	447	736	422	711	177	141	36.1	32.0
SB 3-13	465	754	440	729	177	141	36.5	32.4


Performance Range

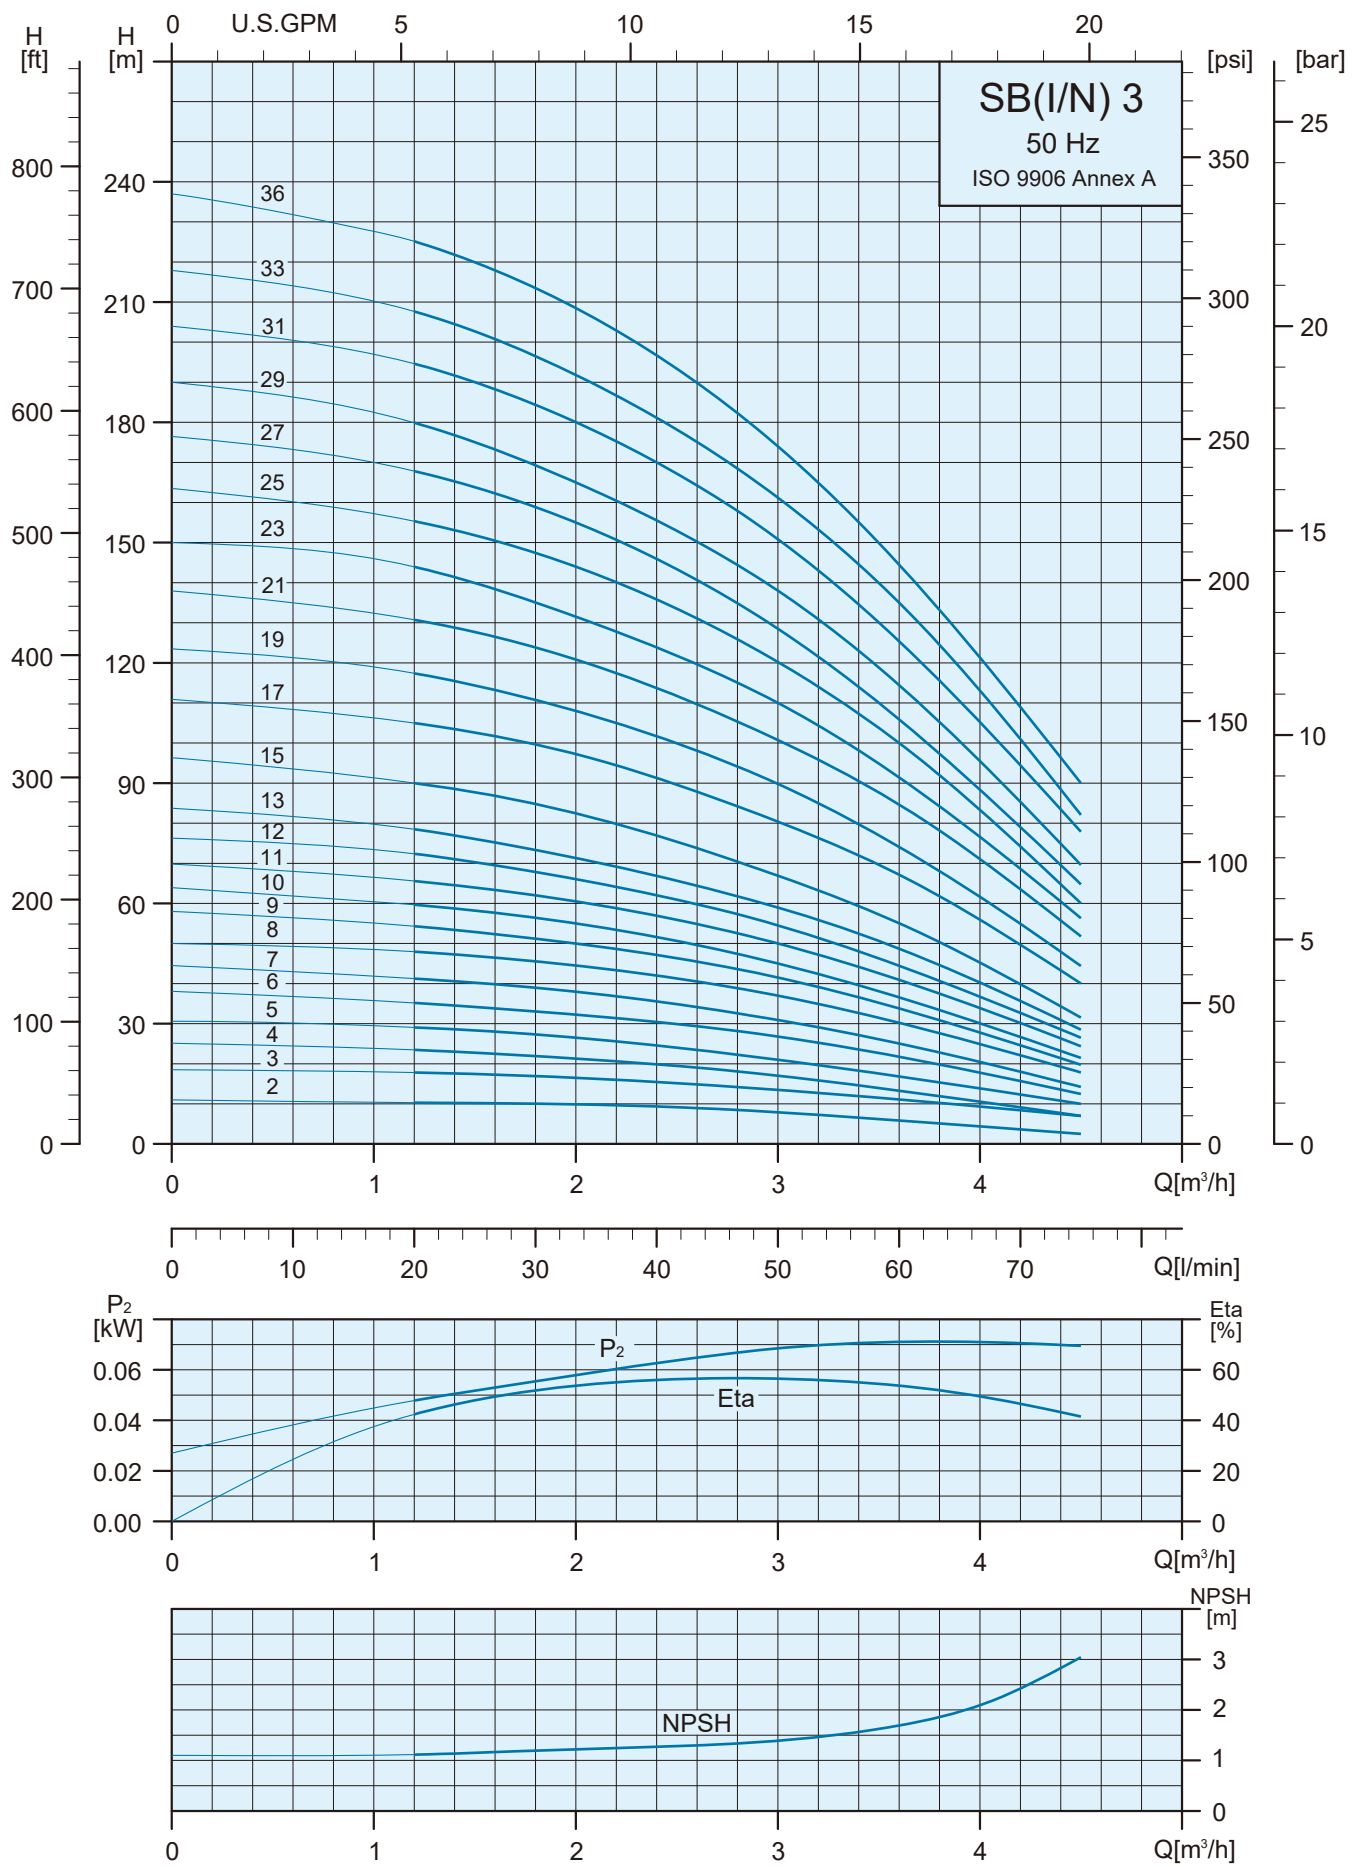

Specifications

Pump Type	Motor		Nominal Current [A]				
	P ₂		1ø	3ø		3ø	
	kW	HP	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V
SB 3-15	1.1	1.5	8.0 - 6.9	4.0 - 3.8	2.3 - 2.2	—	—
SB 3-17	1.5	2.0	9.5 - 8.9	5.9 - 6.0	3.4 - 3.5	—	—
SB 3-19	1.5	2.0	9.5 - 8.9	5.9 - 6.0	3.4 - 3.5	—	—
SB 3-21	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SB 3-23	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SB 3-25	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SB 3-27	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SB 3-29	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SB 3-31	3.0	4.0	—	11.4 - 11.2	6.6 - 6.5	6.4 - 6.0	3.7 - 3.5
SB 3-33	3.0	4.0	—	11.4 - 11.2	6.6 - 6.5	6.4 - 6.0	3.7 - 3.5
SB 3-36	3.0	4.0	—	11.4 - 11.2	6.6 - 6.5	6.4 - 6.0	3.7 - 3.5

Dimensions and Weights

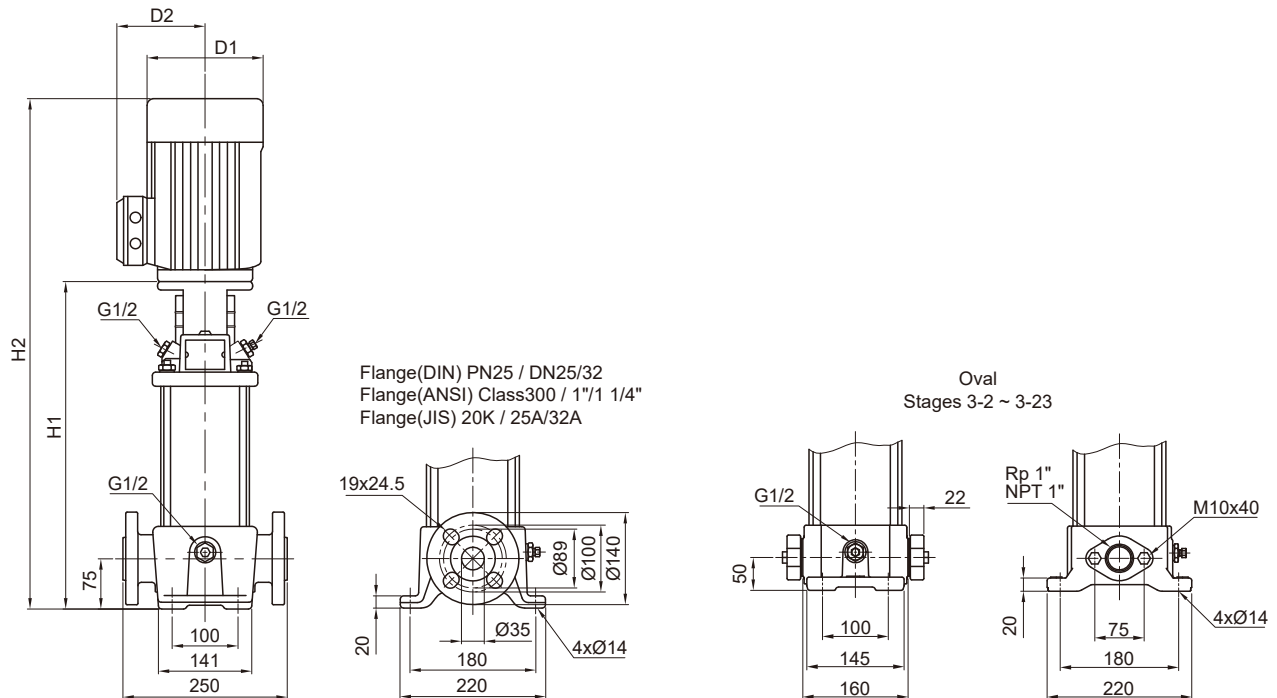

Pump Type	Dimensions (mm)						Net Weight(kg)	
	DIN flange		OVAL		D1	D2	DIN flange	OVAL
	H1	H2	H1	H2				
SB 3-15	501	790	476	765	177	141	37.2	33.1
SB 3-17	553	848	528	823	177	141	42.0	37.9
SB 3-19	589	884	564	859	177	141	42.8	38.7
SB 3-21	625	920	600	895	177	141	45.3	41.2
SB 3-23	661	956	636	931	177	141	46.1	42.0
SB 3-25	697	992	—	—	177	141	46.8	—
SB 3-27	733	1028	—	—	177	141	47.6	—
SB 3-29	769	1064	—	—	177	141	48.3	—
SB 3-31	809	1125	—	—	197	147	58.0	—
SB 3-33	845	1161	—	—	197	147	58.8	—
SB 3-36	899	1215	—	—	197	147	59.9	—