

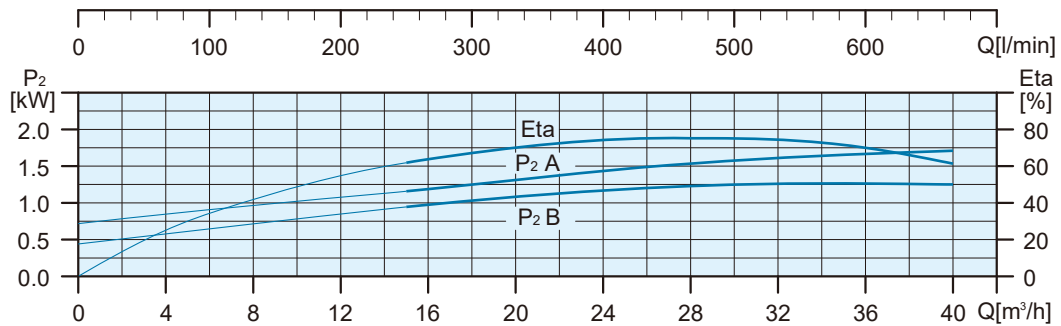


Performance Range

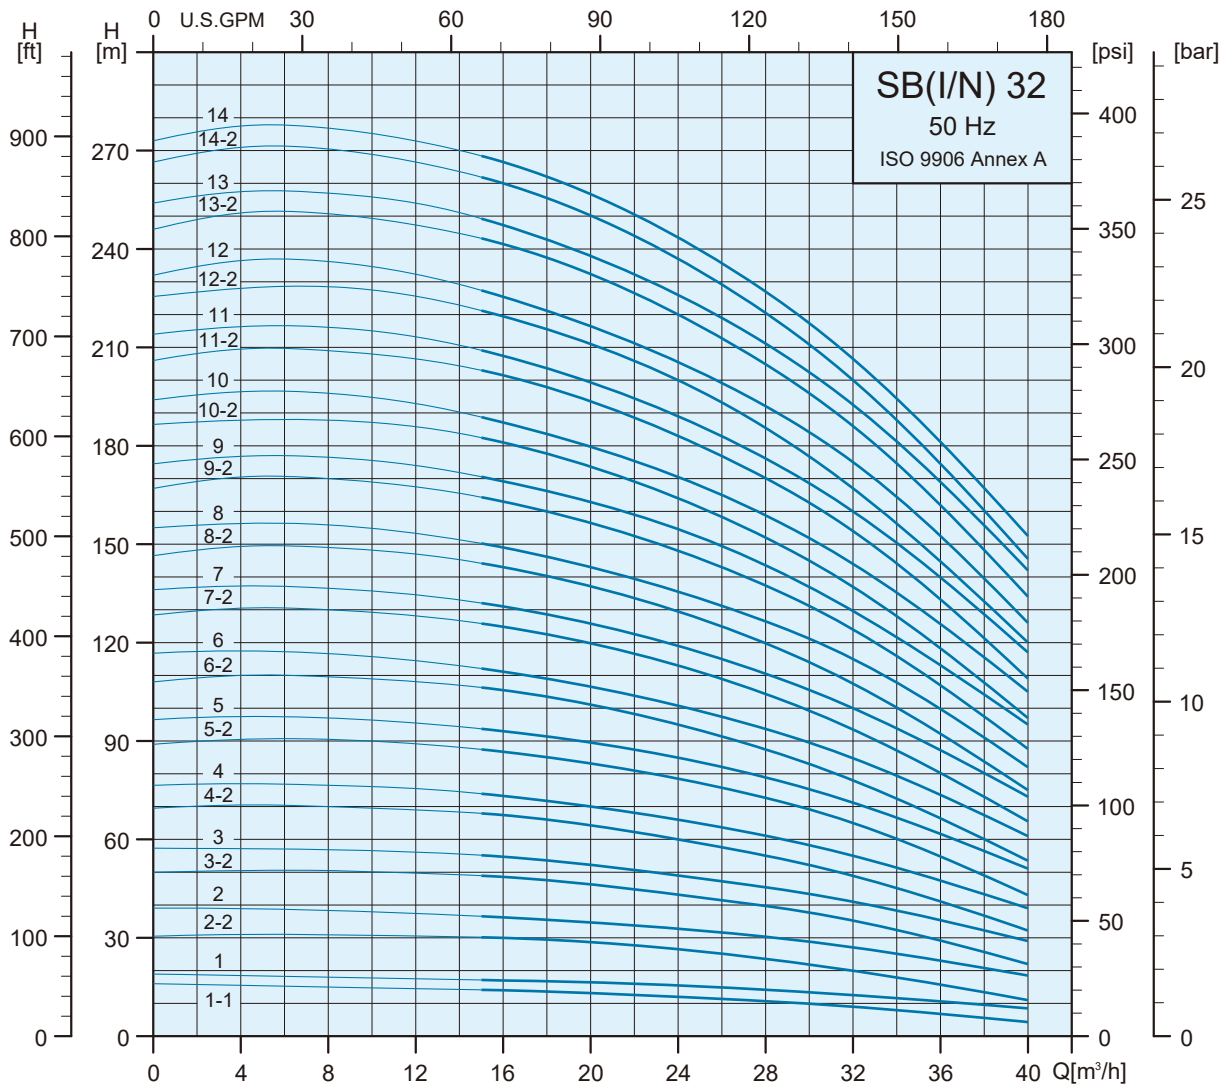


*The P2 power of single impeller show A means regular impeller, Show B means small impeller

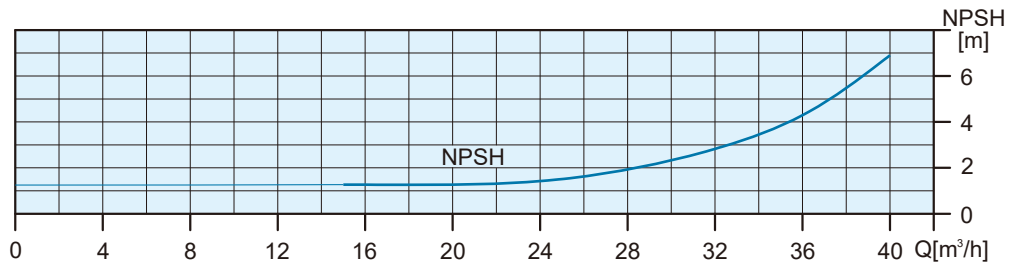

Specifications

Pump Type	Motor		Nominal Current [A]				
	P ₂		1ø	3ø		3ø	
	kW	HP	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V
SB 32-1-1	1.5	2.0	9.5 - 8.9	5.9 - 6.0	3.4 - 3.5	—	—
SB 32-1	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SB 32-2-2	3.0	4.0	—	11.4 - 11.2	6.6 - 6.5	6.4 - 6.0	3.7 - 3.5
SB 32-2	4.0	5.5	—	14.9 - 15.1	8.6 - 8.7	8.5 - 8.2	4.9 - 4.7
SB 32-3-2	5.5	7.5	—	19.7 - 19.4	11.4 - 11.2	11.3 - 10.9	6.5 - 6.3
SB 32-3	5.5	7.5	—	19.7 - 19.4	11.4 - 11.2	11.3 - 10.9	6.5 - 6.3
SB 32-4-2	7.5	10.0	—	26.3 - 25.4	15.2 - 14.7	15.3 - 15.2	8.8 - 8.7
SB 32-4	7.5	10.0	—	26.3 - 25.4	15.2 - 14.7	15.3 - 15.2	8.8 - 8.7
SB 32-5-2	11.0	15.0	—	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7
SB 32-5	11.0	15.0	—	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7
SB 32-6-2	11.0	15.0	—	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7
SB 32-6	11.0	15.0	—	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7
SB 32-7-2	15.0	20.0	—	49.3 - 46.5	28.5 - 26.9	29.4 - 29.0	16.9 - 16.7
SB 32-7	15.0	20.0	—	49.3 - 46.5	28.5 - 26.9	29.4 - 29.0	16.9 - 16.7

Dimensions and Weights

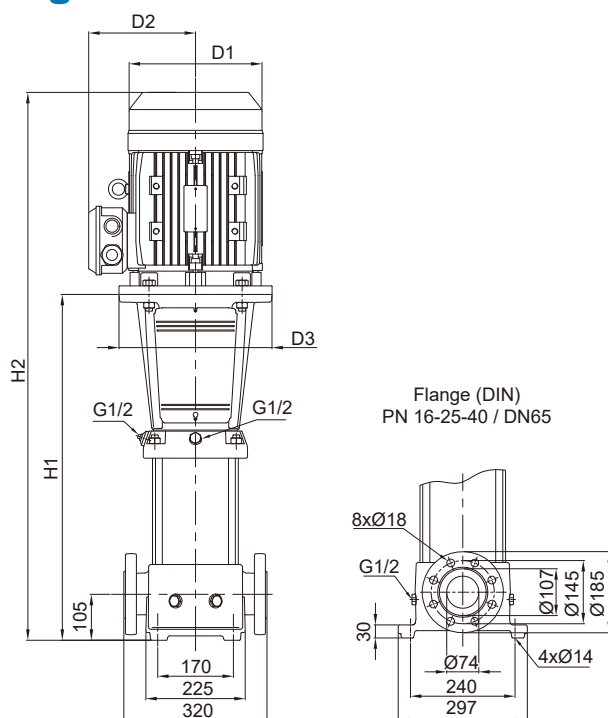


Pump Type	Dimensions (mm)					Net Weight (kg)
	DIN flange		D1	D2	D3	DIN flange
	H1	H2				
SB 32-1-1	504	799	177	141	280	72.5
SB 32-1	504	799	177	141	280	74.3
SB 32-2-2	574	890	197	147	280	85.6
SB 32-2	574	900	220	161	280	89.6
SB 32-3-2	644	1006	235	197	300	109.5
SB 32-3	644	1006	235	197	300	109.5
SB 32-4-2	714	1119	235	197	300	118.4
SB 32-4	714	1119	235	197	300	118.4
SB 32-5-2	894	1339	269	215	350	158.8
SB 32-5	894	1339	269	215	350	158.8
SB 32-6-2	964	1409	269	215	350	161.8
SB 32-6	964	1409	269	215	350	161.8
SB 32-7-2	1034	1524	269	215	350	175.5
SB 32-7	1034	1524	269	215	350	175.5

Specifications

Pump Type	Motor		Nominal Current [A]				
	P ₂		1ø	3ø		3ø	
	kW	HP	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V
SB 32-8-2	15.0	20.0	—	49.3 - 46.5	28.5 - 26.9	29.4 - 29.0	16.9 - 16.7
SB 32-8	15.0	20.0	—	49.3 - 46.5	28.5 - 26.9	29.4 - 29.0	16.9 - 16.7
SB 32-9-2	18.5	25.0	—	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3
SB 32-9	18.5	25.0	—	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3
SB 32-10-2	18.5	25.0	—	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3
SB 32-10	18.5	25.0	—	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3
SB 32-11-2	22.0	30.0	—	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8
SB 32-11	22.0	30.0	—	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8
SB 32-12-2	22.0	30.0	—	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8
SB 32-12	22.0	30.0	—	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8
SB 32-13-2	30.0	40.0	—	—	—	54.9 - 50.3	31.6 - 29.0
SB 32-13	30.0	40.0	—	—	—	54.9 - 50.3	31.6 - 29.0
SB 32-14-2	30.0	40.0	—	—	—	54.9 - 50.3	31.6 - 29.0
SB 32-14	30.0	40.0	—	—	—	54.9 - 50.3	31.6 - 29.0

Dimensions and Weights

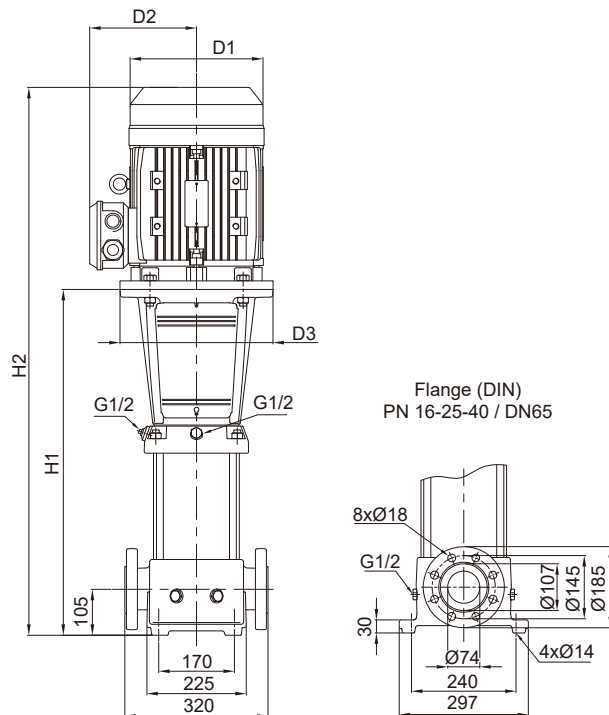

Pump Type	Dimensions (mm)					Net Weight (kg)
	DIN flange		D1	D2	D3	DIN flange
	H1	H2				
SB 32-8-2	1104	1594	269	215	350	178.6
SB 32-8	1104	1594	269	215	350	178.6
SB 32-9-2	1174	1714	318	241	350	214.6
SB 32-9	1174	1714	318	241	350	214.6
SB 32-10-2	1244	1784	318	241	350	217.7
SB 32-10	1244	1784	318	241	350	217.7
SB 32-11-2	1314	1854	318	241	350	232.8
SB 32-11	1314	1854	318	241	350	232.8
SB 32-12-2	1384	1924	318	241	350	234.8
SB 32-12	1384	1924	318	241	350	234.8
SB 32-13-2	1454	2114	390	295	400	341.2
SB 32-13	1454	2114	390	295	400	341.2
SB 32-14-2	1524	2184	390	295	400	344.3
SB 32-14	1524	2184	390	295	400	344.3