



Performance Range

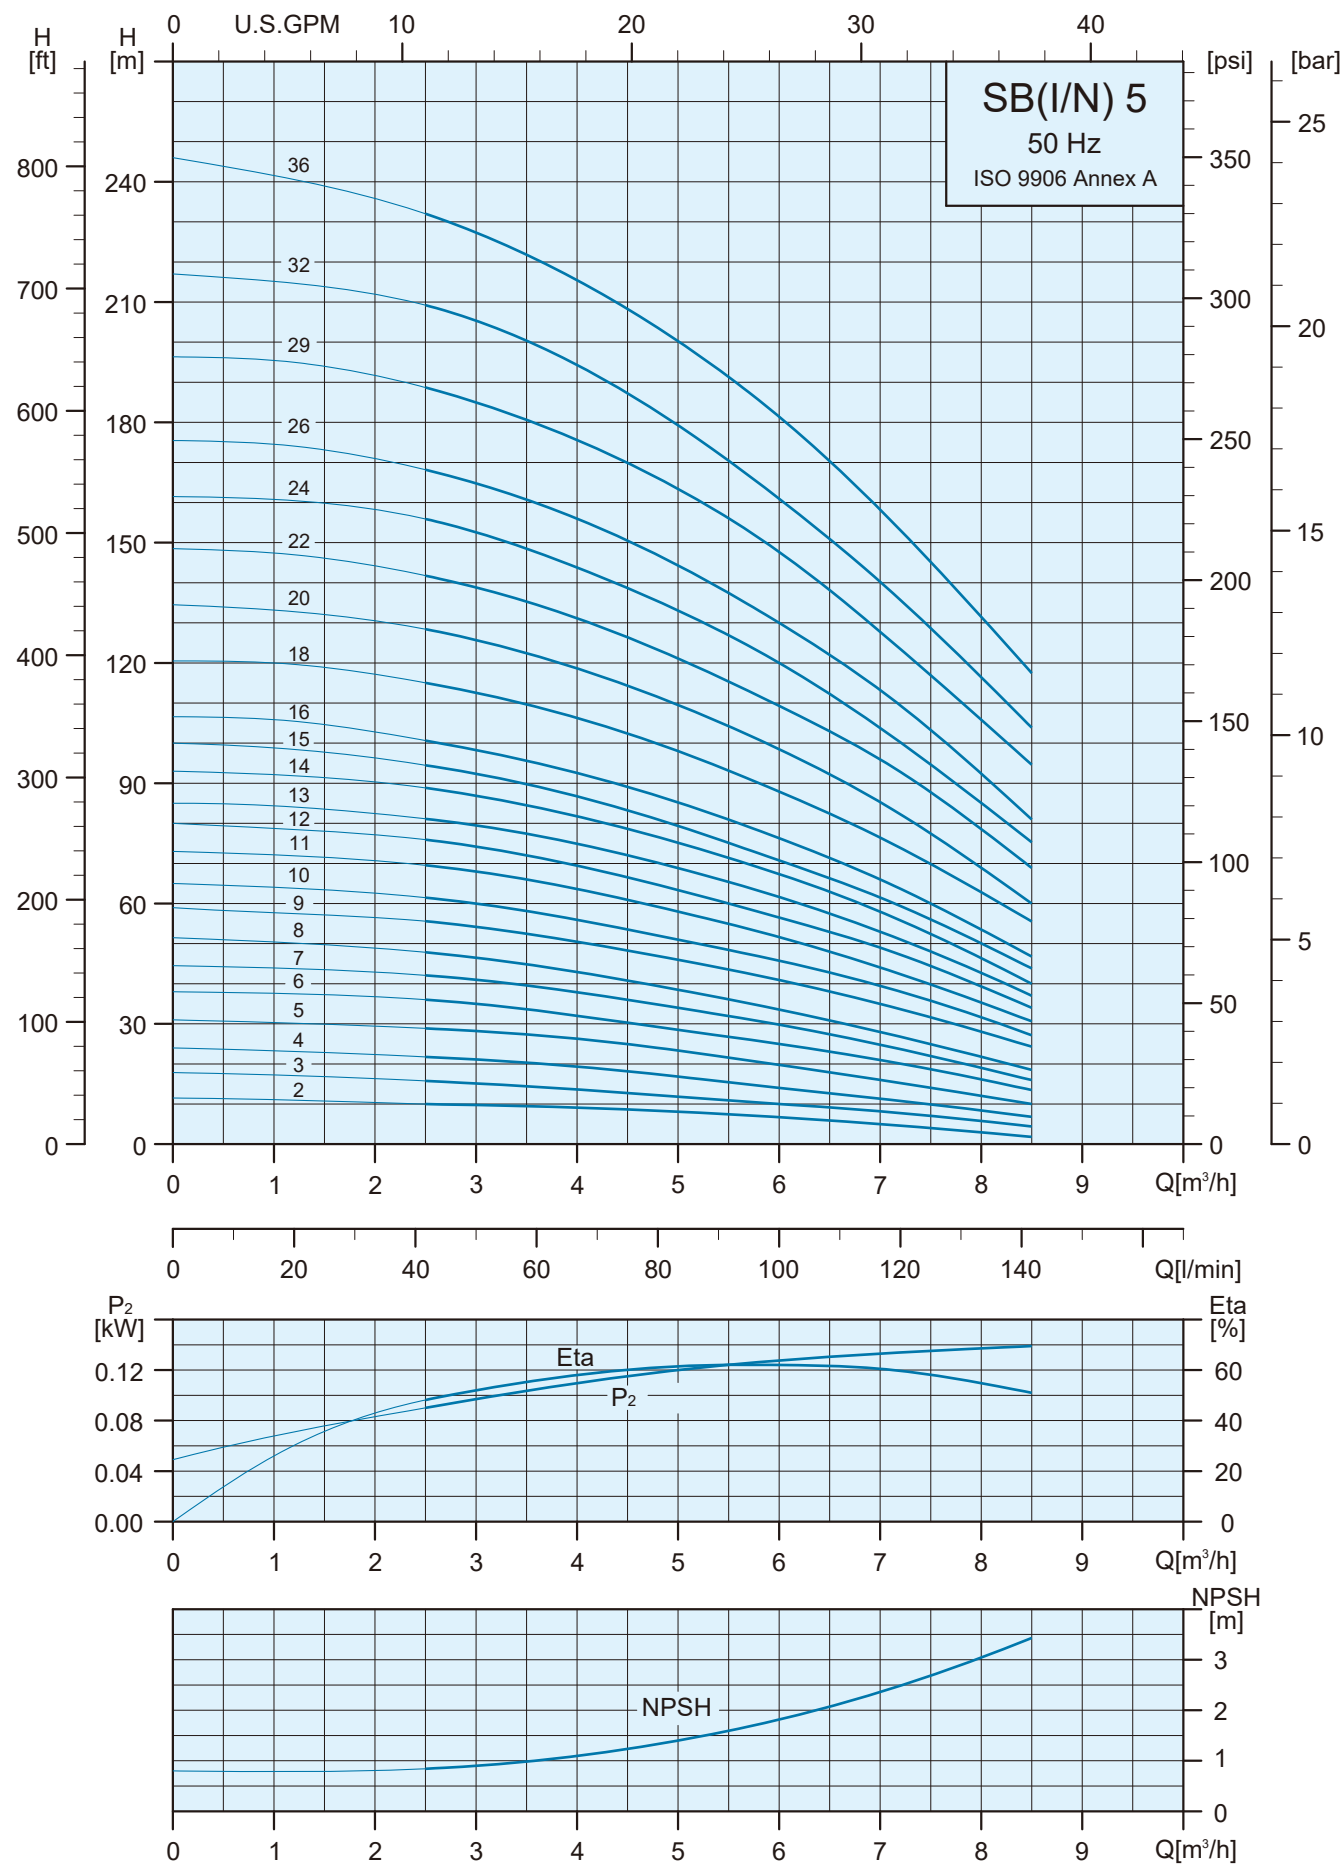

Specifications


Pump Type	Motor		Nominal Current [A]				
	P ₂		1ø	3ø		3ø	
	kW	HP	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V
SB 5-2	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	—	—
SB 5-3	0.55	0.75	4.0 - 3.5	2.6 - 2.9	1.5 - 1.7	—	—
SB 5-4	0.55	0.75	4.0 - 3.5	2.6 - 2.9	1.5 - 1.7	—	—
SB 5-5	0.75	1.0	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	—	—
SB 5-6	1.1	1.5	8.0 - 6.9	4.0 - 3.8	2.3 - 2.2	—	—
SB 5-7	1.1	1.5	8.0 - 6.9	4.0 - 3.8	2.3 - 2.2	—	—
SB 5-8	1.1	1.5	8.0 - 6.9	4.0 - 3.8	2.3 - 2.2	—	—
SB 5-9	1.5	2.0	9.5 - 8.9	5.9 - 6.0	3.4 - 3.5	—	—
SB 5-10	1.5	2.0	9.5 - 8.9	5.9 - 6.0	3.4 - 3.5	—	—
SB 5-11	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SB 5-12	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SB 5-13	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—

Dimensions and Weights

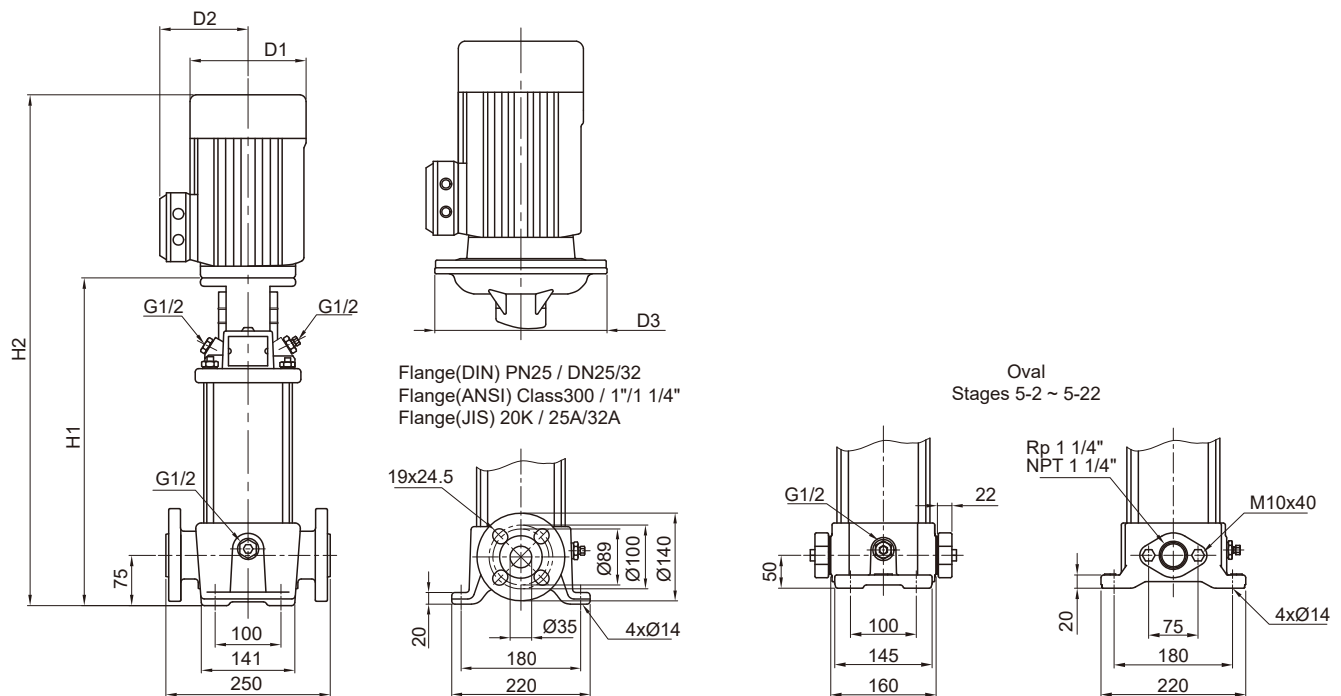


Pump Type	Dimensions (mm)							Net Weight (kg)	
	DIN flange		OVAL		D1	D2	D3	DIN flange	OVAL
	H1	H2	H1	H2					
SB 5-2	279	474	254	449	141	115	—	23.3	19.0
SB 5-3	306	501	281	476	141	115	—	24.2	19.9
SB 5-4	333	528	308	503	141	115	—	24.8	20.5
SB 5-5	366	601	341	576	141	115	—	27.4	23.1
SB 5-6	393	682	368	657	177	141	—	34.7	30.4
SB 5-7	420	709	395	684	177	141	—	35.2	30.9
SB 5-8	447	736	422	711	177	141	—	35.7	31.4
SB 5-9	490	785	465	760	177	141	—	40.3	36.0
SB 5-10	517	812	492	787	177	141	—	40.9	36.6
SB 5-11	544	839	519	814	177	141	—	43.2	38.9
SB 5-12	571	866	546	841	177	141	—	43.7	39.4
SB 5-13	598	893	573	868	177	141	—	44.2	39.9

Performance Range

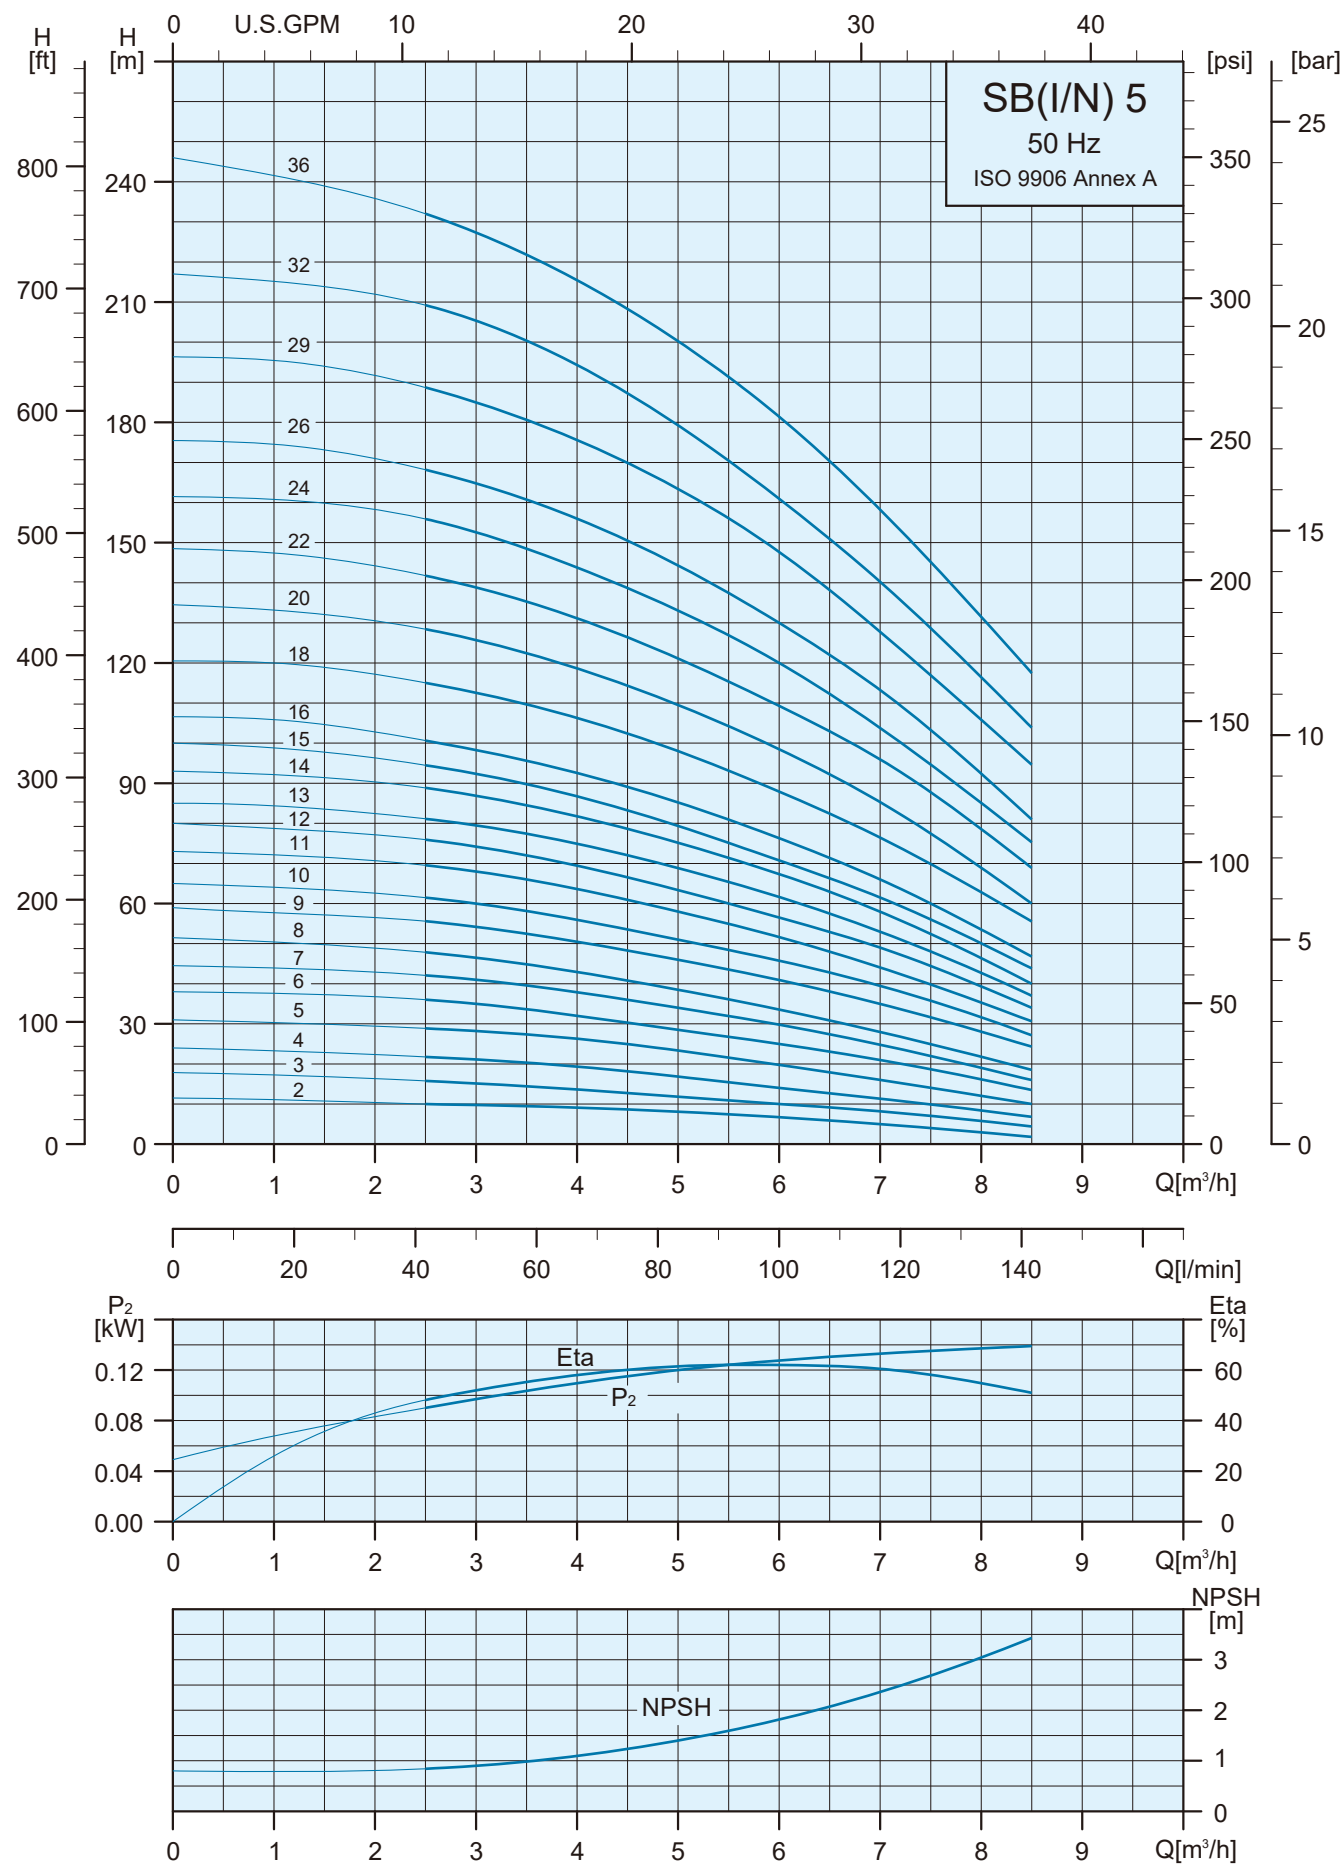

Pump Type	Motor		Nominal Current [A]				
	P ₂		1ø	3ø		3ø	
	kW	HP	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V
SB 5-14	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SB 5-15	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SB 5-16	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SB 5-18	3.0	4.0	—	11.4 - 11.2	6.6 - 6.5	6.4 - 6.0	3.7 - 3.5
SB 5-20	3.0	4.0	—	11.4 - 11.2	6.6 - 6.5	6.4 - 6.0	3.7 - 3.5
SB 5-22	4.0	5.5	—	14.9 - 15.1	8.6 - 8.7	8.5 - 8.2	4.9 - 4.7
SB 5-24	4.0	5.5	—	14.9 - 15.1	8.6 - 8.7	8.5 - 8.2	4.9 - 4.7
SB 5-26	4.0	5.5	—	14.9 - 15.1	8.6 - 8.7	8.5 - 8.2	4.9 - 4.7
SB 5-29	4.0	5.5	—	14.9 - 15.1	8.6 - 8.7	8.5 - 8.2	4.9 - 4.7
SB 5-32	5.5	7.5	—	19.7 - 19.4	11.4 - 11.2	11.3 - 10.9	6.5 - 6.3
SB 5-36	5.5	7.5	—	19.7 - 19.4	11.4 - 11.2	11.3 - 10.9	6.5 - 6.3

Dimensions and Weights

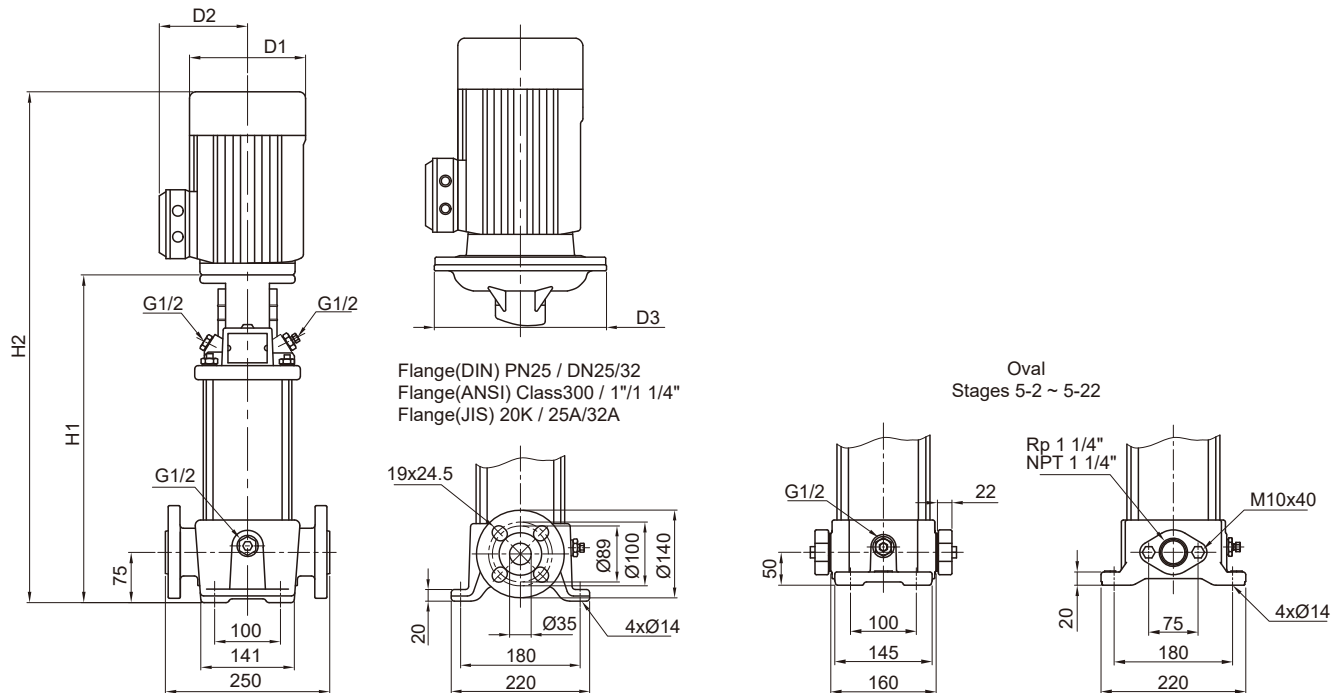

Pump Type	Dimensions (mm)							Net Weight (kg)	
	DIN flange		OVAL		D1	D2	D3	DIN flange	OVAL
	H1	H2	H1	H2					
SB 5-14	625	920	600	895	177	141	—	44.8	40.5
SB 5-15	652	947	627	922	177	141	—	45.2	40.9
SB 5-16	679	974	654	949	177	141	—	45.8	41.5
SB 5-18	737	1053	712	1028	197	147	—	55.7	51.4
SB 5-20	791	1107	766	1082	197	147	—	56.9	52.6
SB 5-22	845	1171	820	1146	220	161	—	61.8	57.5
SB 5-24	899	1225	—	—	220	161	—	62.8	—
SB 5-26	953	1279	—	—	220	161	—	64.7	—
SB 5-29	1034	1360	—	—	220	161	—	66.6	—
SB 5-32	1145	1507	—	—	235	197	300	89.4	—
SB 5-36	1253	1615	—	—	235	197	300	91.9	—