



Performance Range

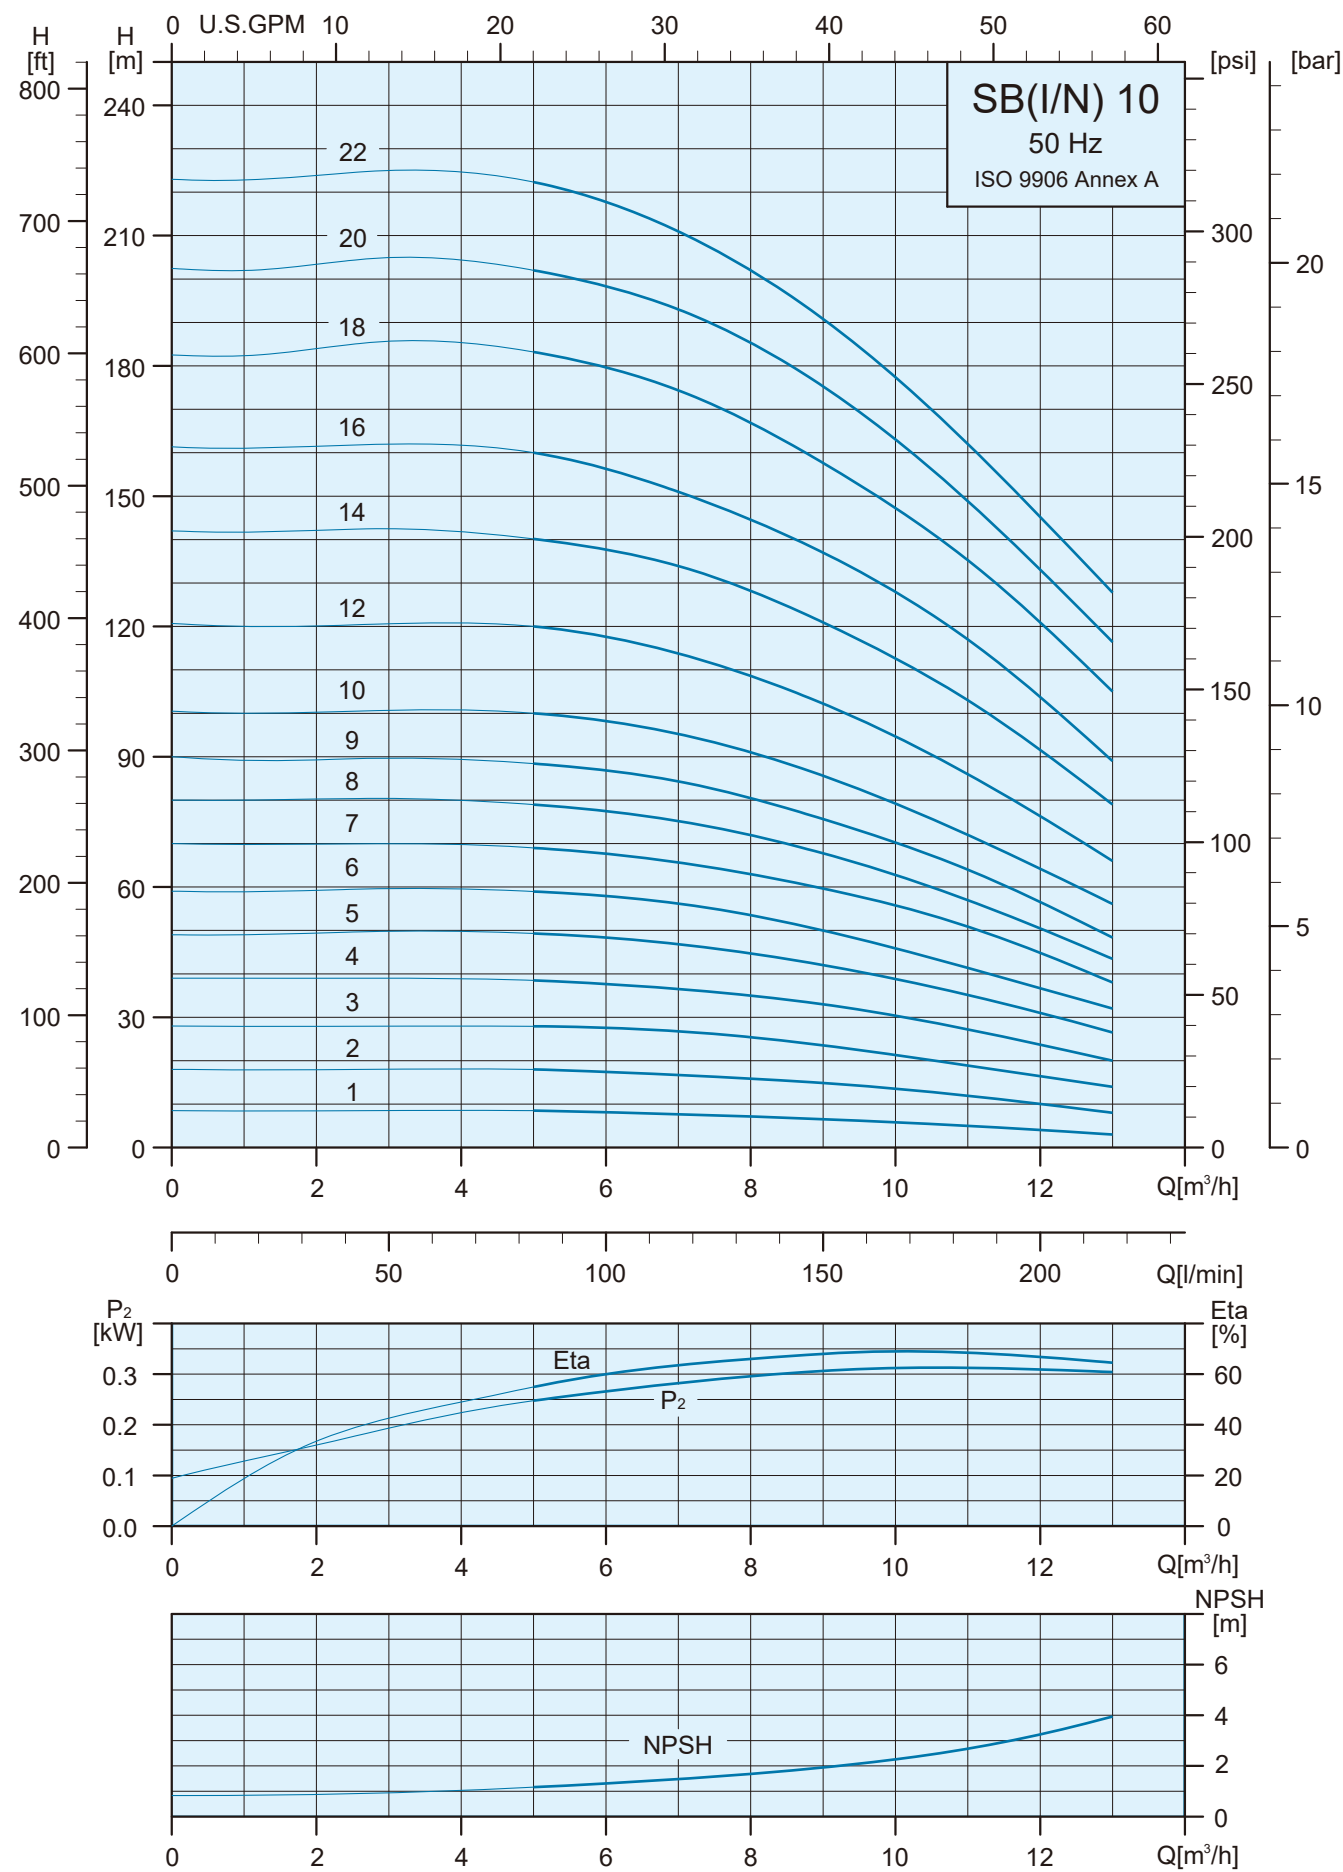

Specifications

Pump Type	Motor		Nominal Current [A]				
	P ₂		1ø	3ø		3ø	
	kW	HP	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V
SBI(N) 10-1	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	—	—
SBI(N) 10-2	0.75	1.0	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	—	—
SBI(N) 10-3	1.1	1.5	8.0 - 6.9	4.0 - 3.8	2.3 - 2.2	—	—
SBI(N) 10-4	1.5	2.0	9.5 - 8.9	5.9 - 6.0	3.4 - 3.5	—	—
SBI(N) 10-5	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SBI(N) 10-6	2.2	3.0	13.4 - 12.7	8.5 - 8.3	4.9 - 4.8	—	—
SBI(N) 10-7	3.0	4.0	—	11.4 - 11.2	6.6 - 6.5	6.4 - 6.0	3.7 - 3.5
SBI(N) 10-8	3.0	4.0	—	11.4 - 11.2	6.6 - 6.5	6.4 - 6.0	3.7 - 3.5
SBI(N) 10-9	3.0	4.0	—	11.4 - 11.2	6.6 - 6.5	6.4 - 6.0	3.7 - 3.5
SBI(N) 10-10	4.0	5.5	—	14.9 - 15.1	8.6 - 8.7	8.5 - 8.2	4.9 - 4.7
SBI(N) 10-12	4.0	5.5	—	14.9 - 15.1	8.6 - 8.7	8.5 - 8.2	4.9 - 4.7
SBI(N) 10-14	5.5	7.5	—	19.7 - 19.4	11.4 - 11.2	11.3 - 10.9	6.5 - 6.3
SBI(N) 10-16	5.5	7.5	—	19.7 - 19.4	11.4 - 11.2	11.3 - 10.9	6.5 - 6.3
SBI(N) 10-18	7.5	10.0	—	26.3 - 25.4	15.2 - 14.7	15.3 - 15.2	8.8 - 8.7
SBI(N) 10-20	7.5	10.0	—	26.3 - 25.4	15.2 - 14.7	15.3 - 15.2	8.8 - 8.7
SBI(N) 10-22	7.5	10.0	—	26.3 - 25.4	15.2 - 14.7	15.3 - 15.2	8.8 - 8.7

Dimensions and Weights

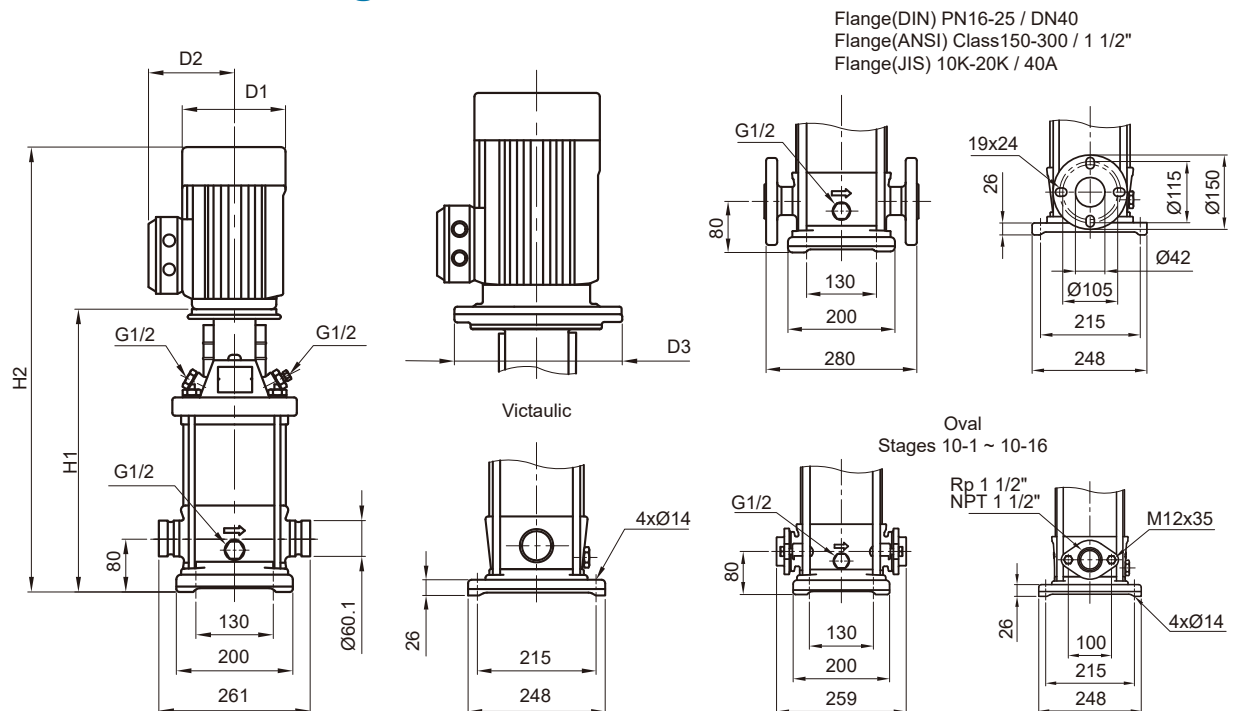

Pump Type	Dimensions (mm)									Net Weight (kg)		
	Victaulic		DIN flange		OVAL		D1	D2	D3	Victaulic	DIN flange	OVAL
	H1	H2	H1	H2	H1	H2						
SBI(N) 10-1	353	548	353	548	353	548	141	115	—	31.6	31.4	29.9
SBI(N) 10-2	357	592	357	592	357	592	141	115	—	34.3	34.2	32.7
SBI(N) 10-3	387	676	387	676	387	676	177	141	—	42.0	36.3	34.8
SBI(N) 10-4	433	728	433	728	433	728	177	141	—	47.1	46.0	44.5
SBI(N) 10-5	463	758	463	758	463	758	177	141	—	50.0	49.8	48.3
SBI(N) 10-6	493	788	493	788	493	788	177	141	—	51.0	50.8	49.3
SBI(N) 10-7	528	844	528	844	528	844	197	147	—	60.5	60.3	58.8
SBI(N) 10-8	558	874	558	874	558	874	197	147	—	61.5	61.4	59.9
SBI(N) 10-9	588	904	588	904	588	904	197	147	—	62.5	62.4	60.9
SBI(N) 10-10	618	944	618	944	618	944	220	161	—	67.6	67.4	65.9
SBI(N) 10-12	678	1004	678	1004	678	1004	220	161	—	69.6	69.5	68.0
SBI(N) 10-14	770	1132	770	1132	770	1132	235	197	300	99.7	99.6	98.1
SBI(N) 10-16	830	1192	830	1192	830	1192	235	197	300	101.8	101.7	100.2
SBI(N) 10-18	890	1295	890	1295	—	—	235	197	300	109.8	111.7	—
SBI(N) 10-20	950	1355	950	1355	—	—	235	197	300	111.9	113.8	—
SBI(N) 10-22	1010	1415	1010	1415	—	—	235	197	300	114.0	114.9	—